

(12) **Patent Application Publication**
Beers

(43) **Pub. Date:** **May 24, 2018**

(52) U.S. Cl.

CPC *A63B 71/12* (2013.01); *A63B 2071/1208*
(2013.01); *A41D 13/0506* (2013.01); *A41D*
13/0512 (2013.01); *A41D 13/0543* (2013.01);
A63B 71/1216 (2013.01); *G08C 17/02*
(2013.01); *A41D 13/015* (2013.01); *A63B*
71/1225 (2013.01); *A63B 2071/1233*
(2013.01); *A63B 2071/1241* (2013.01); *A63B*
2220/833 (2013.01); *A63B 2220/836*
(2013.01); *A63B 2220/89* (2013.01); *A41D*
13/05 (2013.01)

(22) Filed: **Jan. 22, 2018**

Related U.S. Application Data

(62) Division of application No. 14/258,613, filed on Apr. 22, 2014, now Pat. No. 9,908,027.

Publication Classification


(51) **Int. Cl.**

A63B 71/12 (2006.01)
A41D 13/05 (2006.01)
G08C 17/02 (2006.01)
A41D 13/015 (2006.01)

ABSTRACT

(57)

An article of apparel includes a padding system that dynamically changes configuration in response to an impending impact. The padding system may change from a state that has a high flexibility and offers low protection from impact to a state that has a low flexibility and offers increase protection from impact. The system may use a filament to constrict a plurality of padding elements together in order to increase the overall stiffness of the pad. The filament may be tightened and loosened by a spool. The spool may receive a signal regarding the impending impact from a sensor that is a part of the article of apparel, or a sensor that is separate from it.

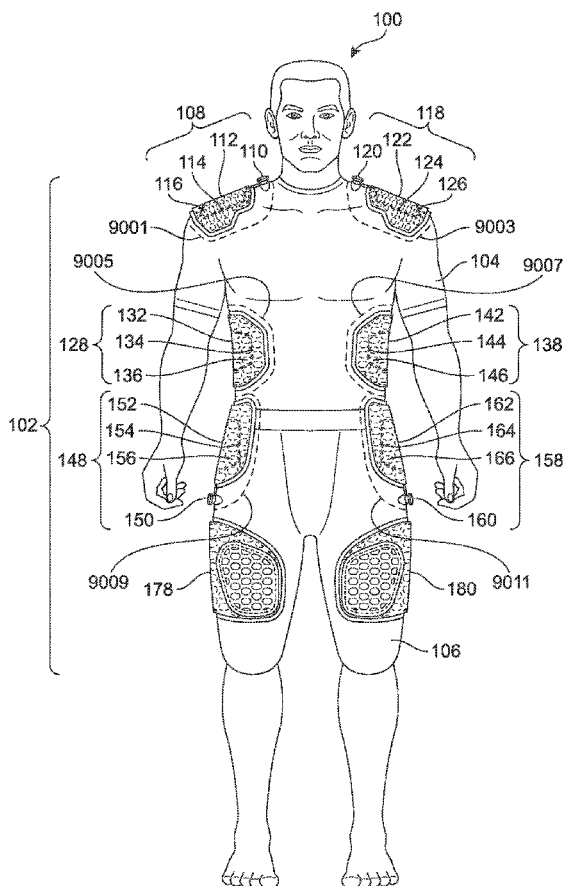

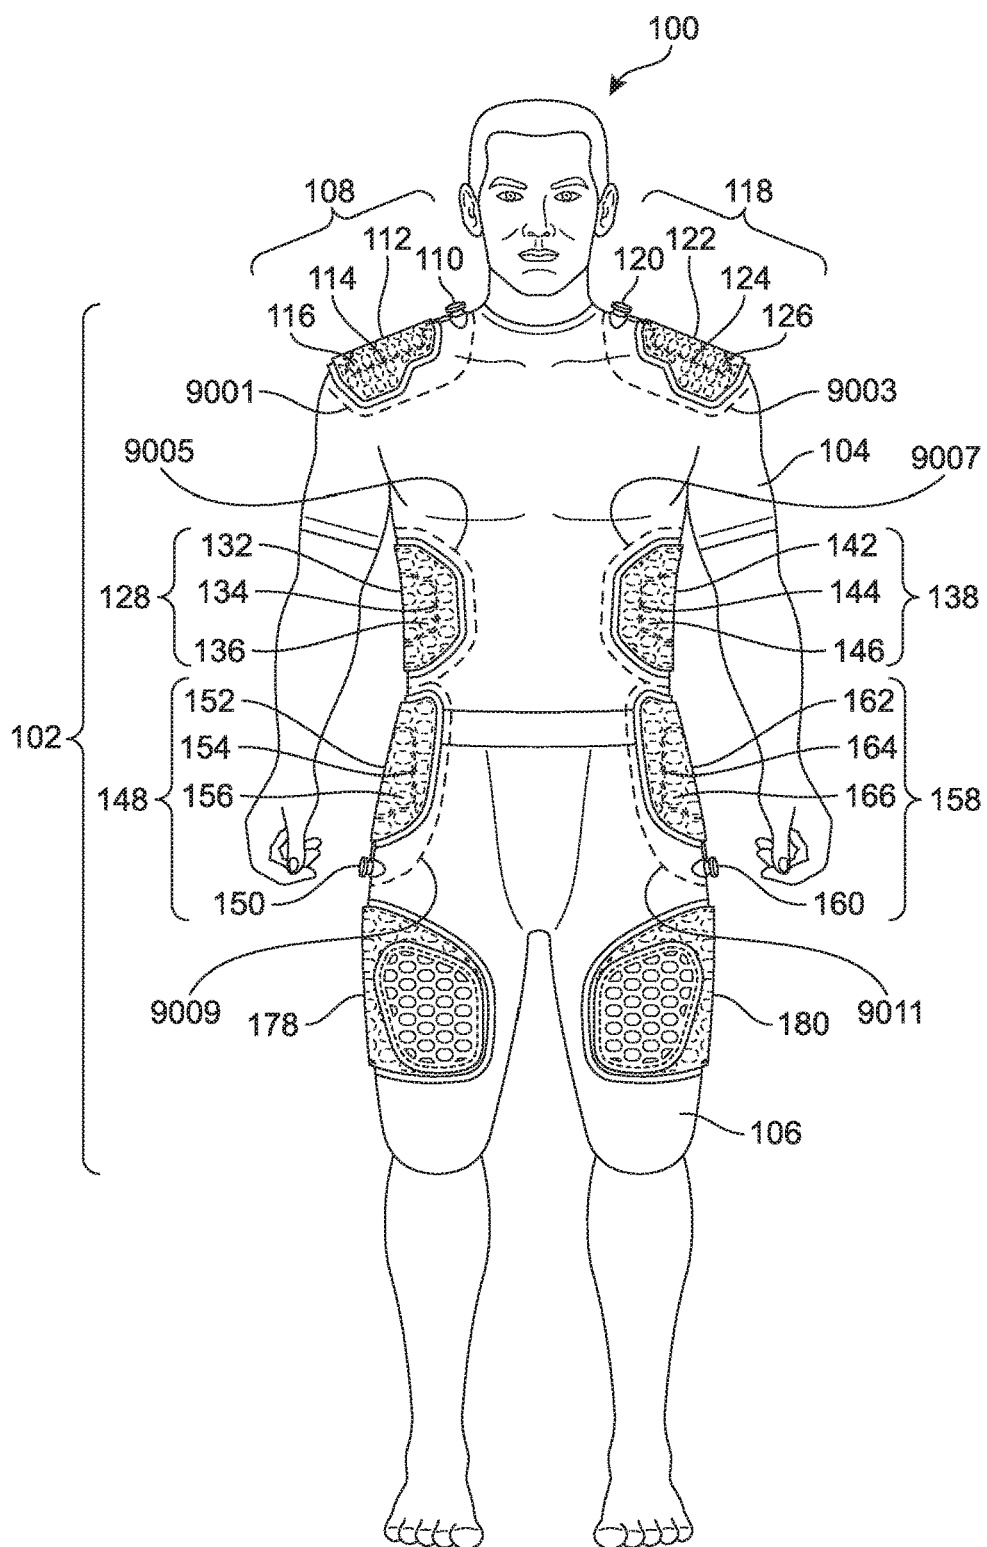


FIG. 1

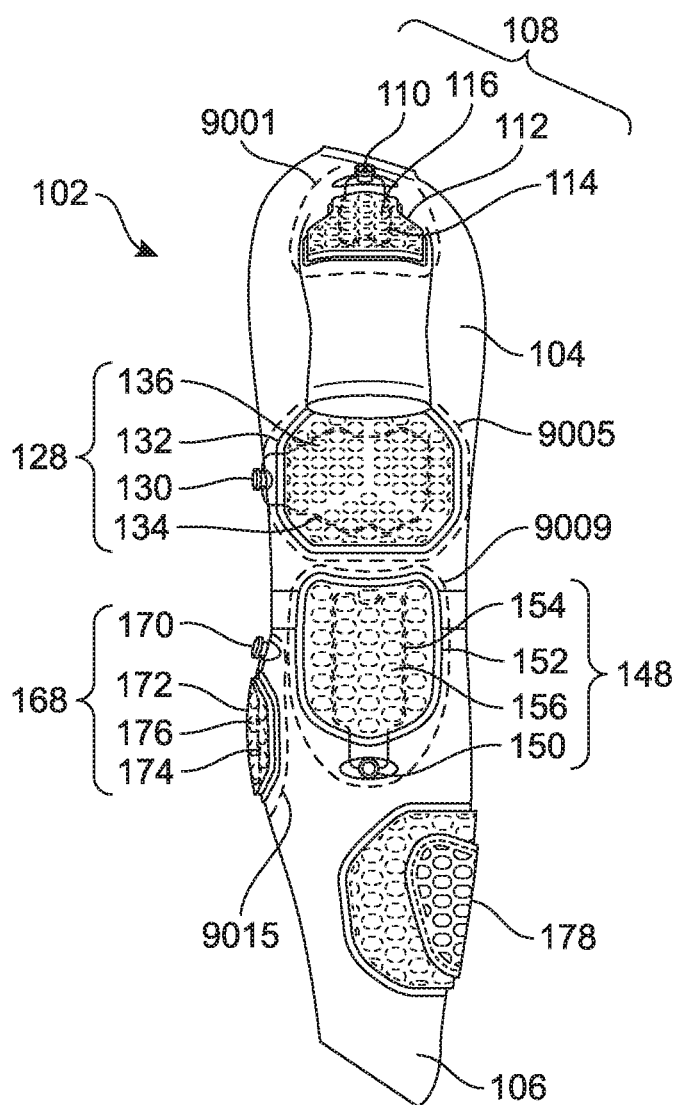


FIG. 2

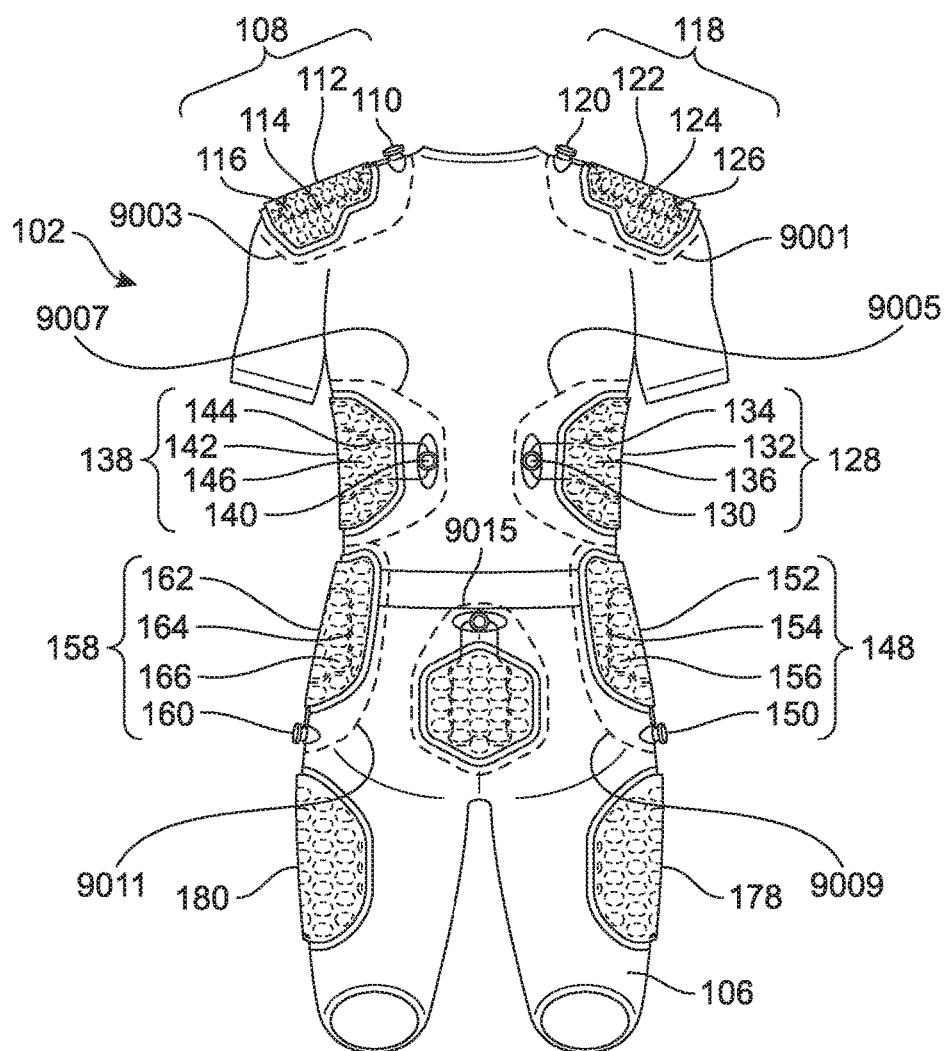


FIG. 3

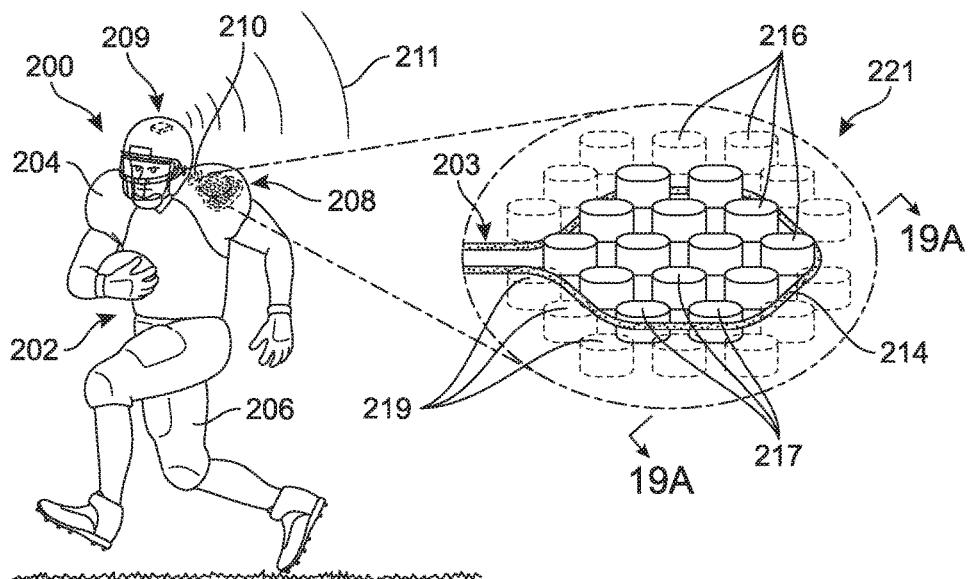


FIG. 4A

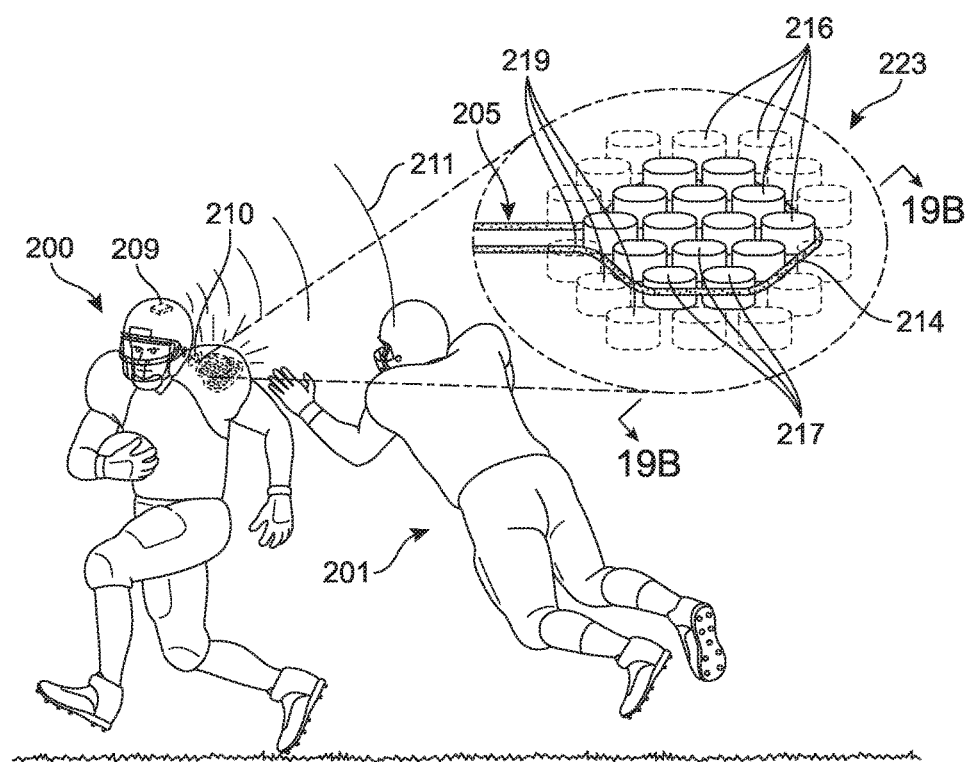


FIG. 4B

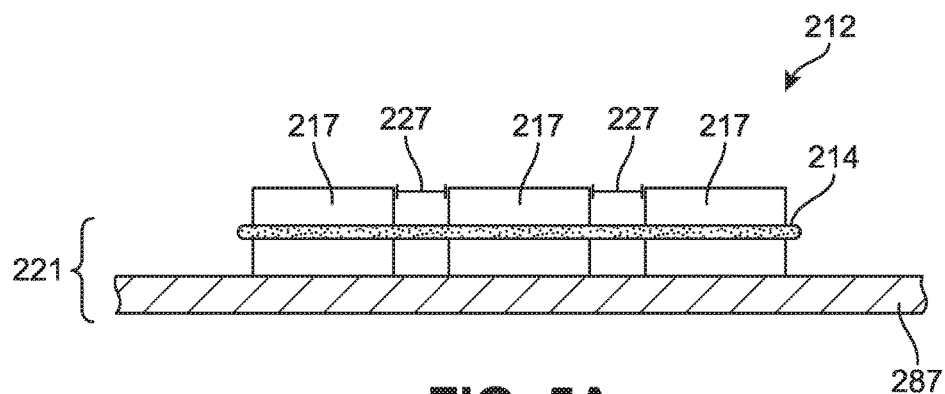


FIG. 5A

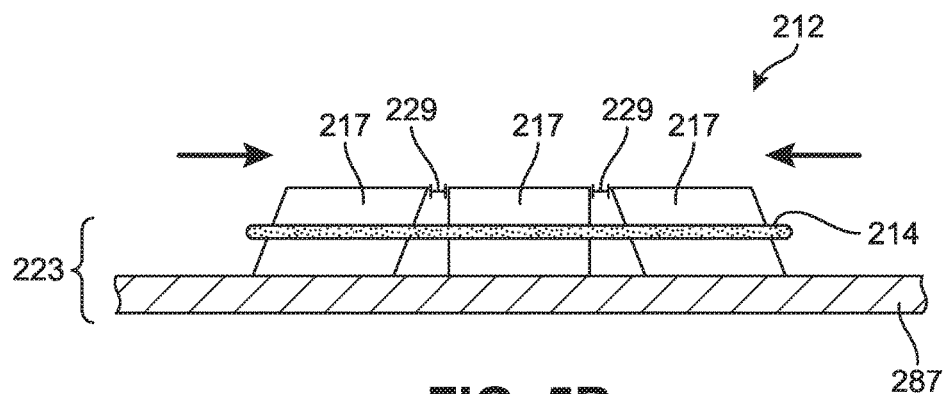


FIG. 5B

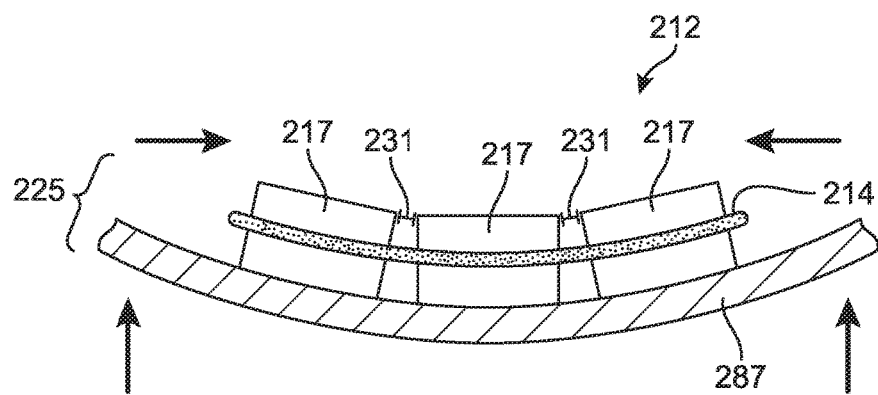


FIG. 5C

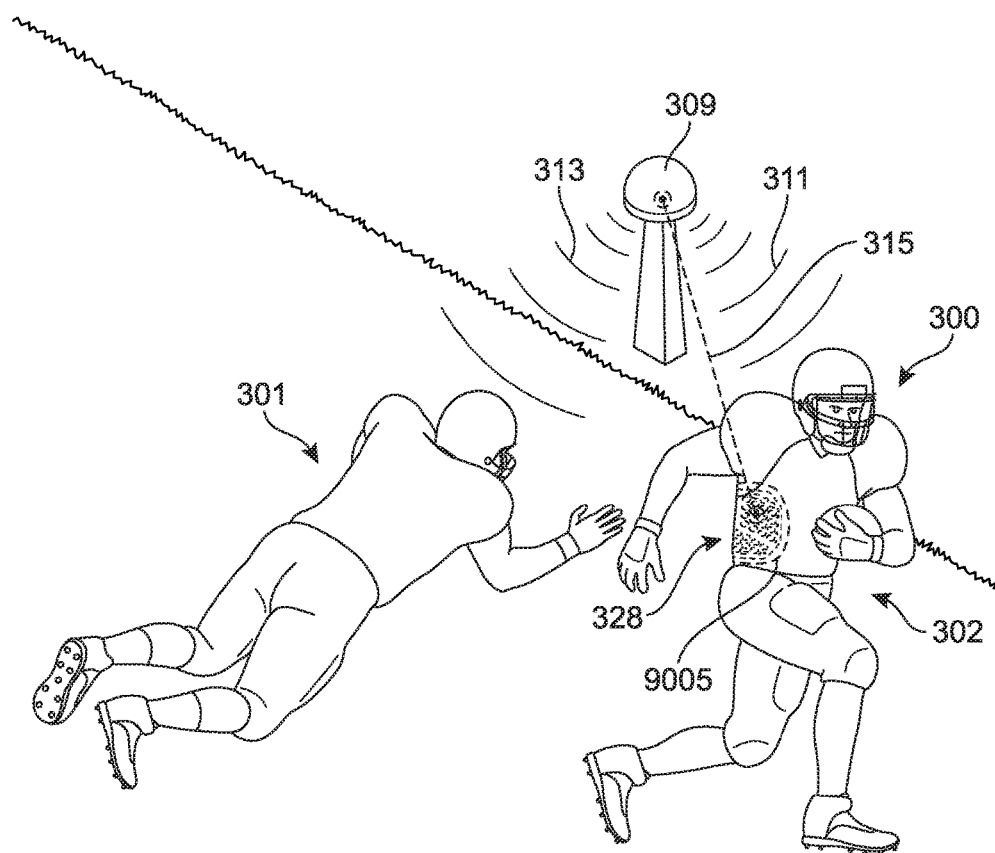


FIG. 6

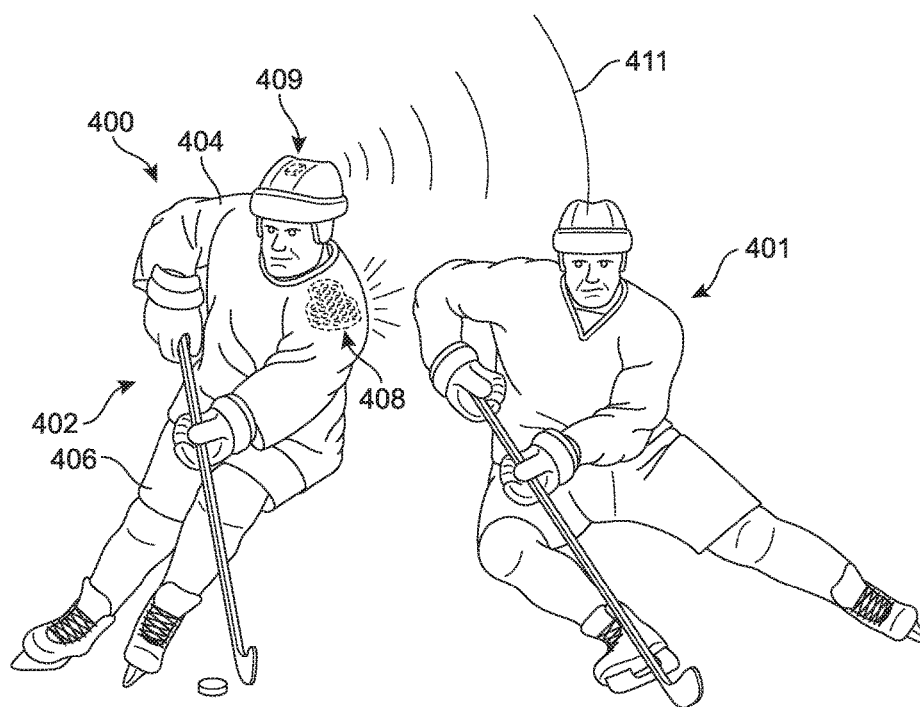


FIG. 7

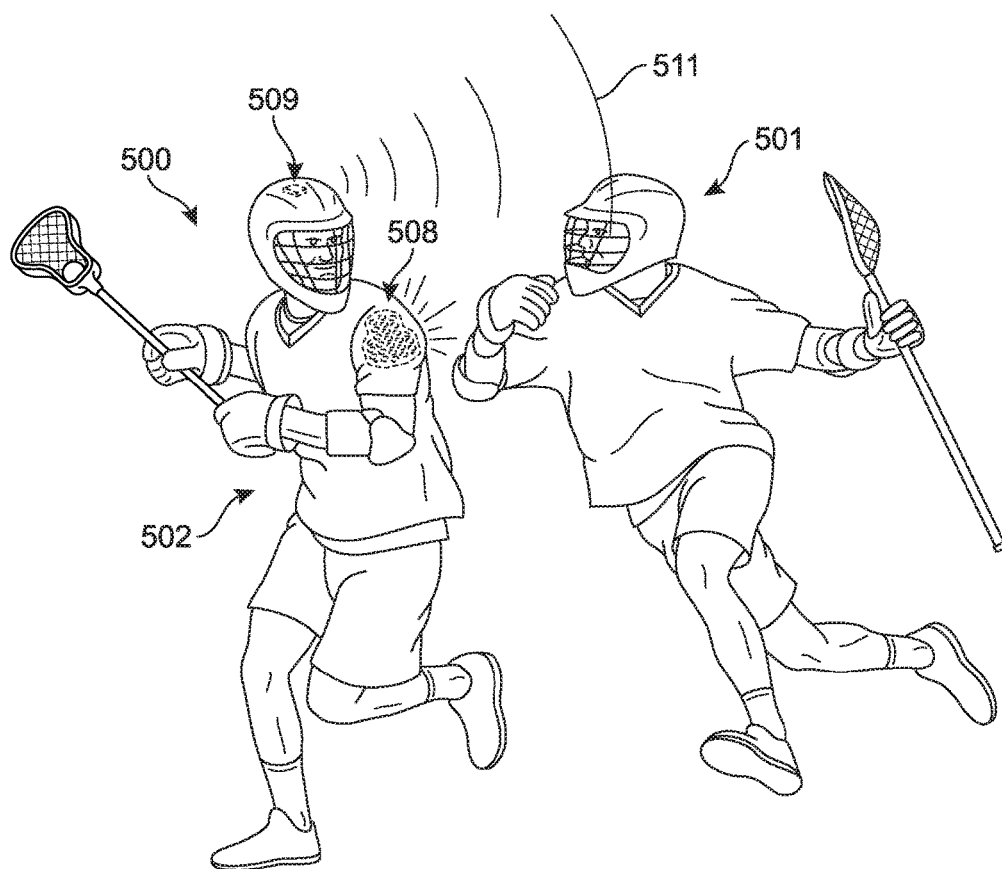


FIG. 8

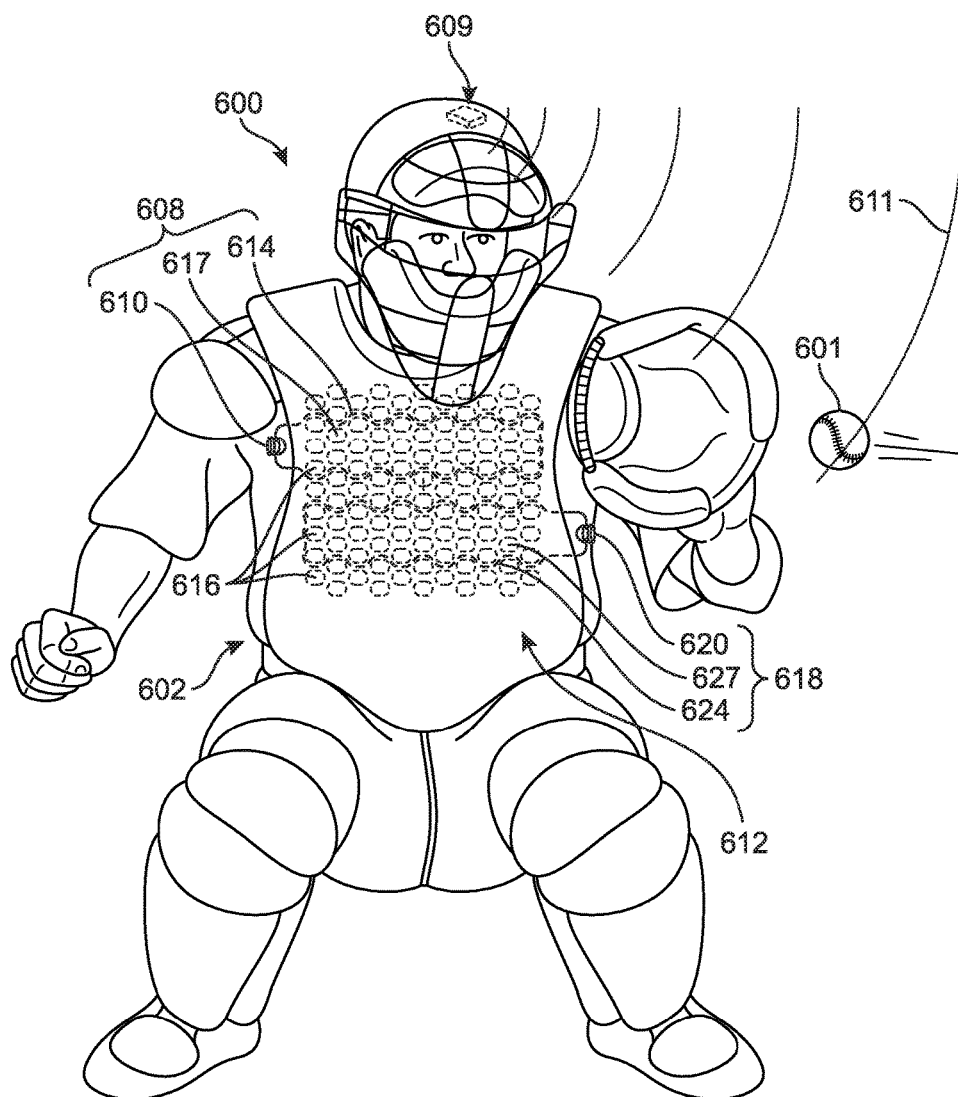
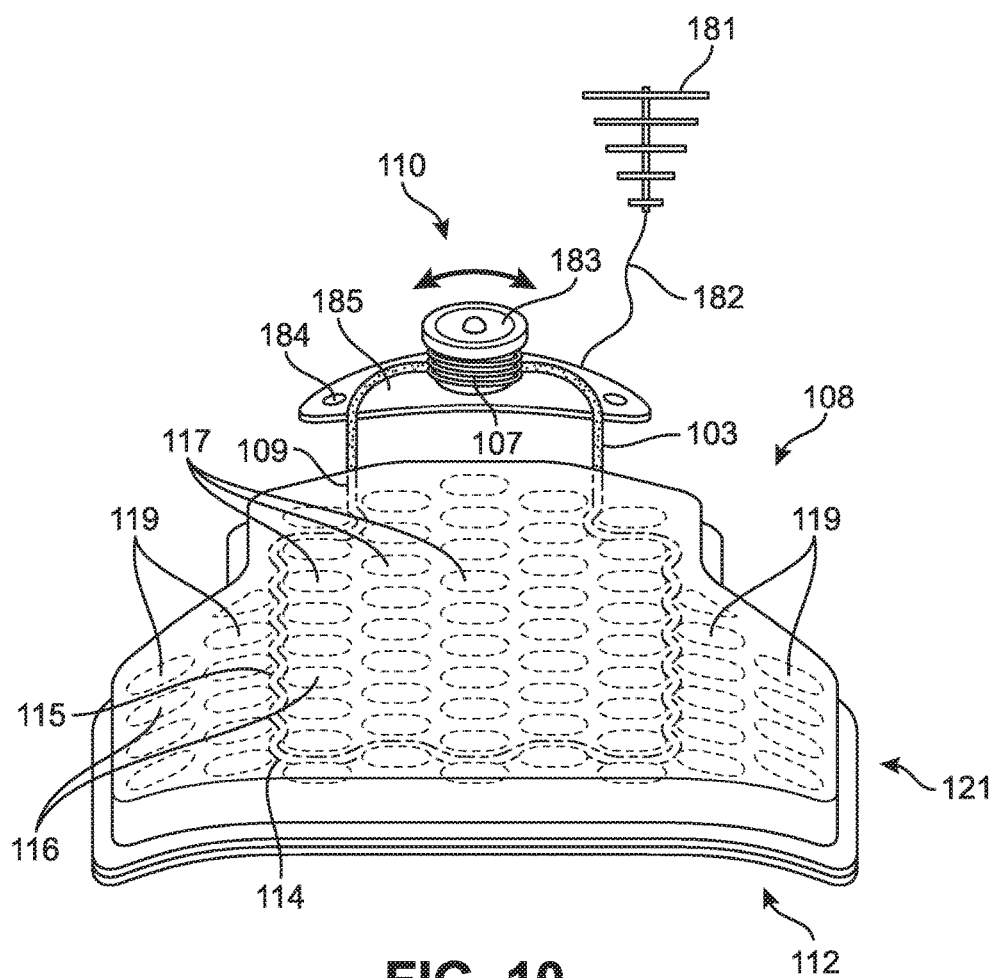
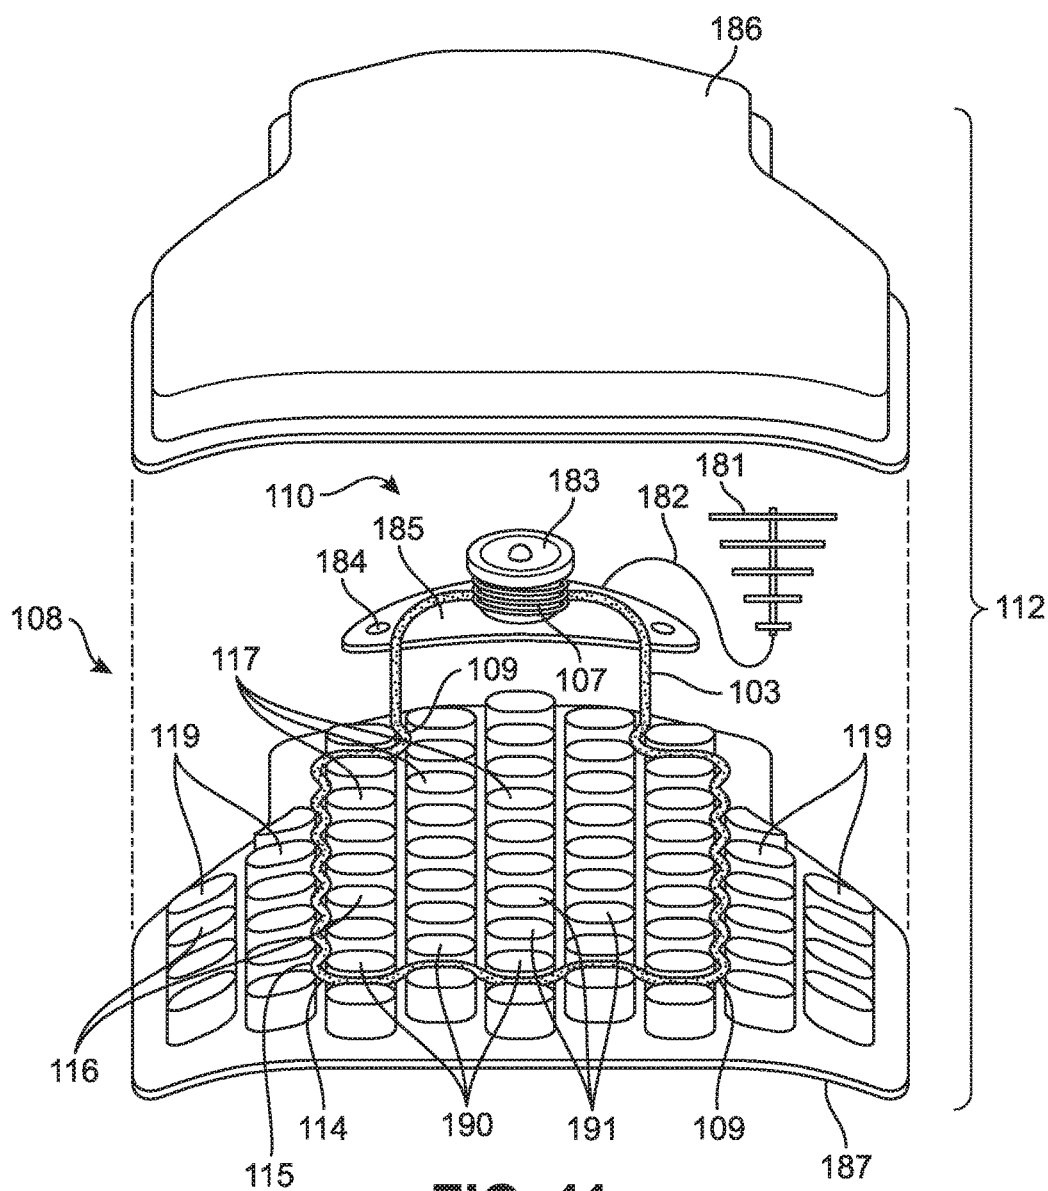


FIG. 9





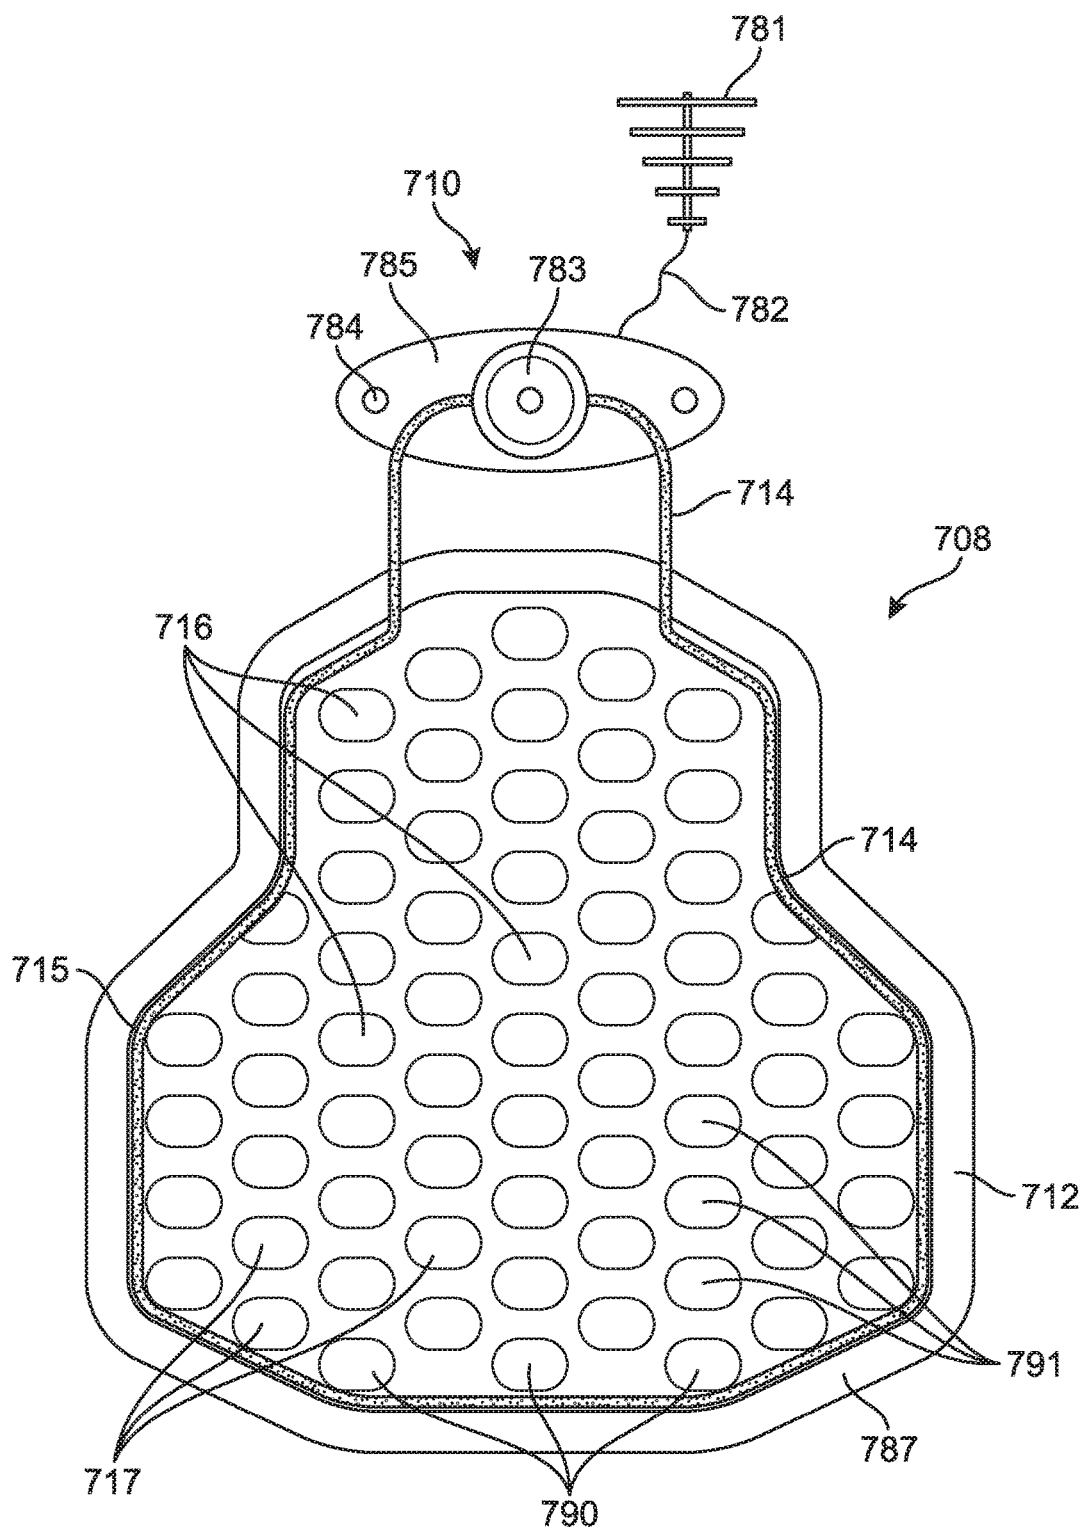


FIG. 12

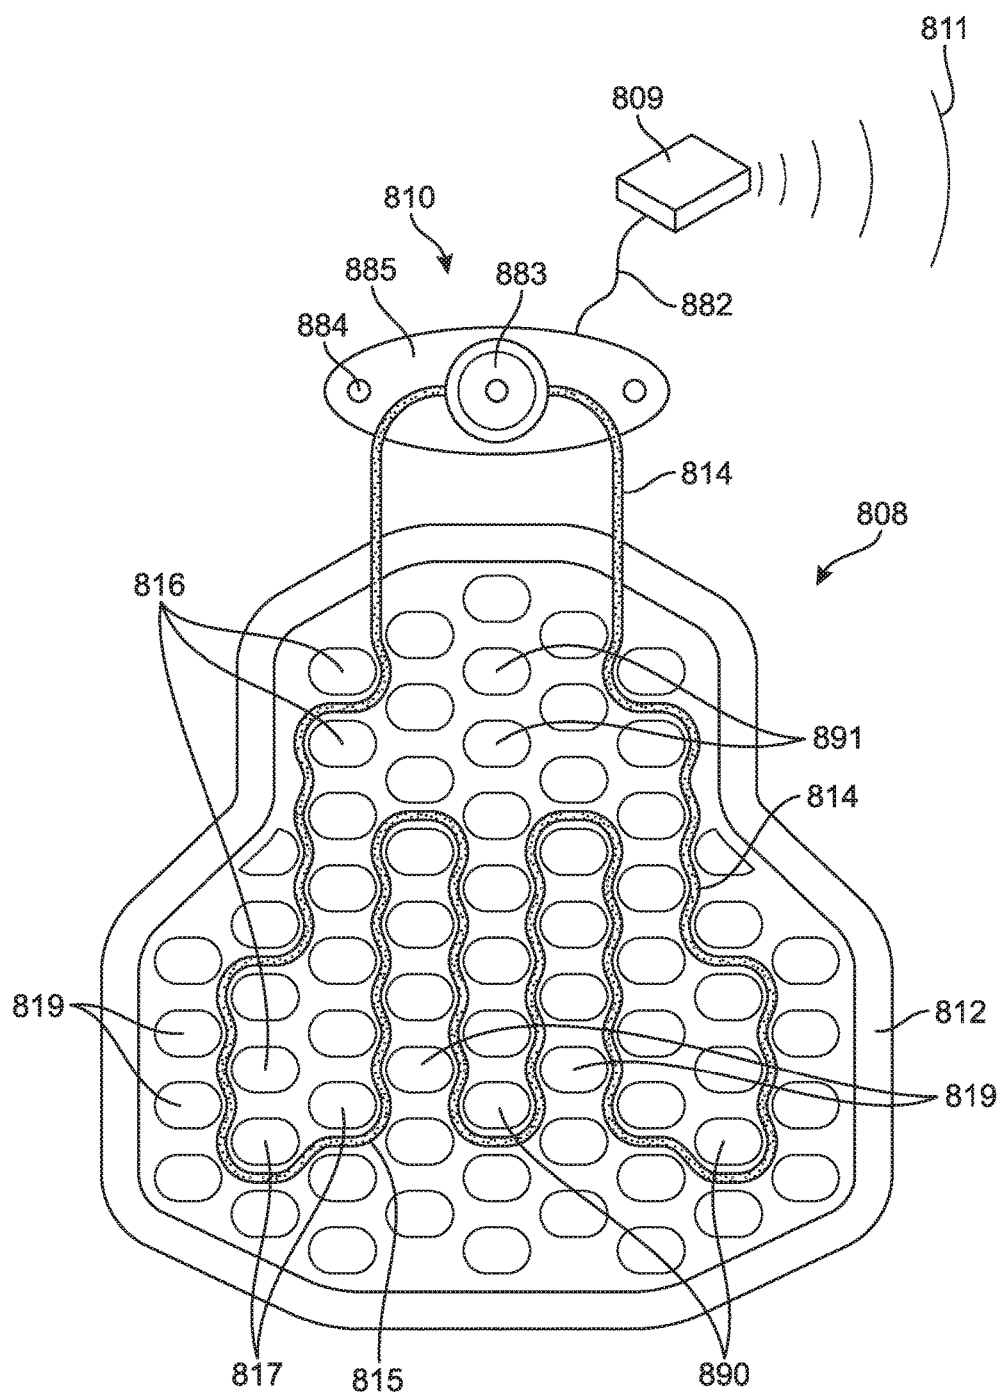
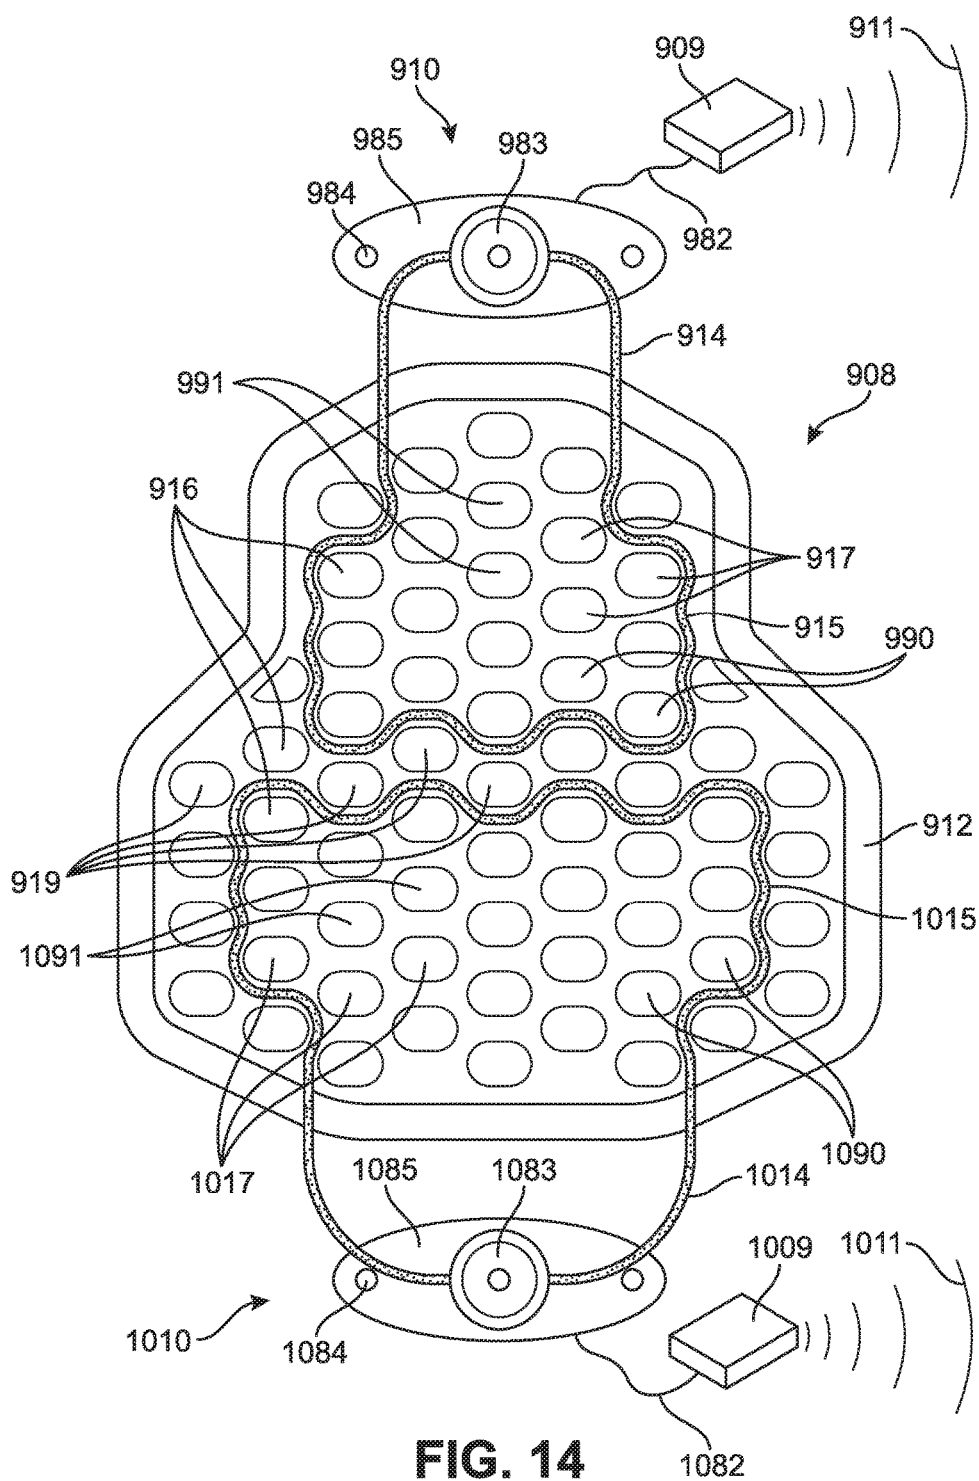


FIG. 13



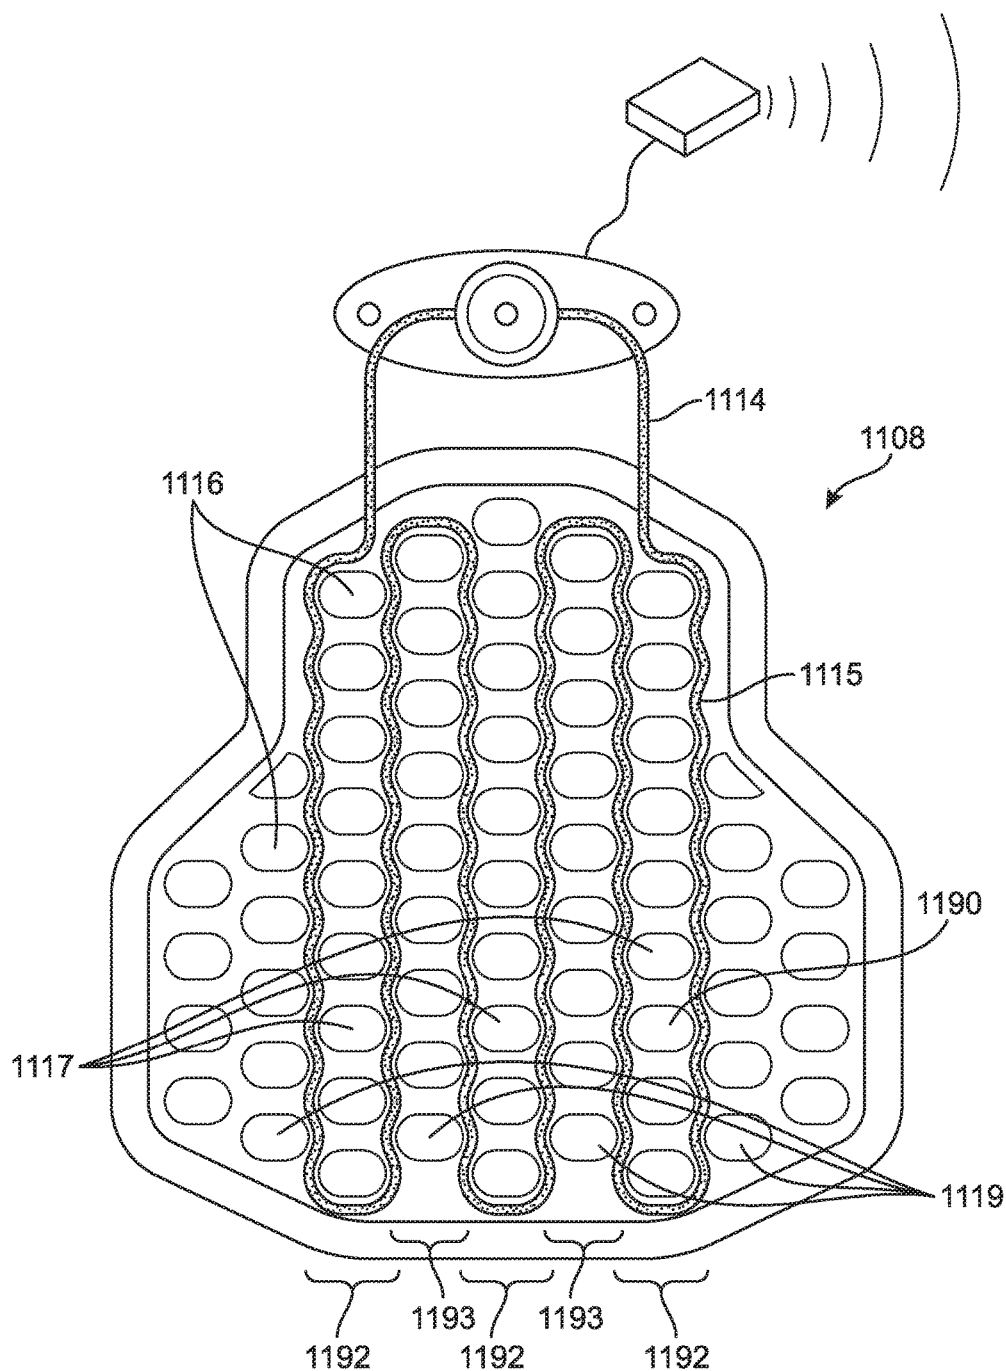


FIG. 15

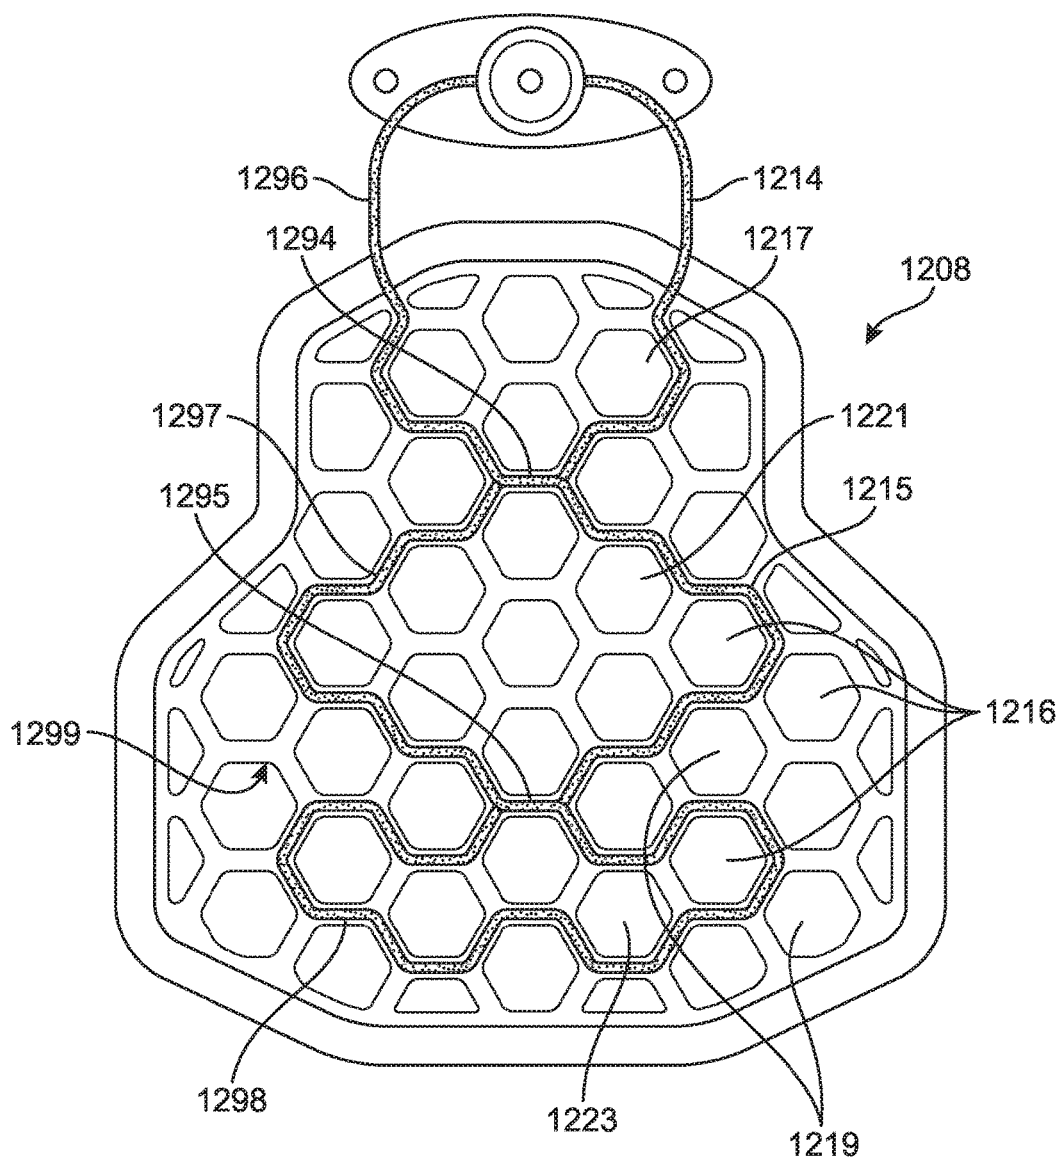


FIG. 16

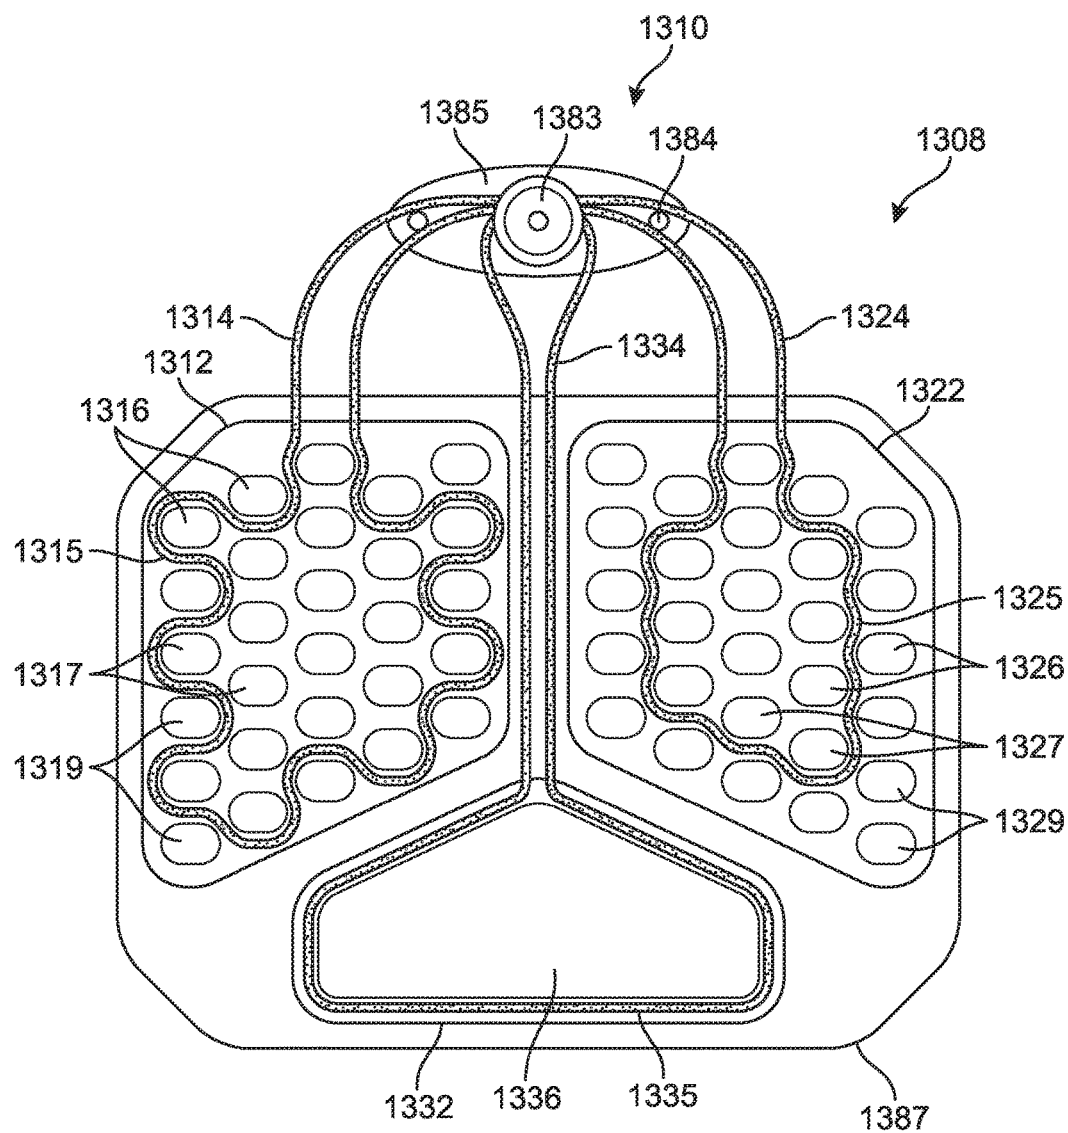


FIG. 17

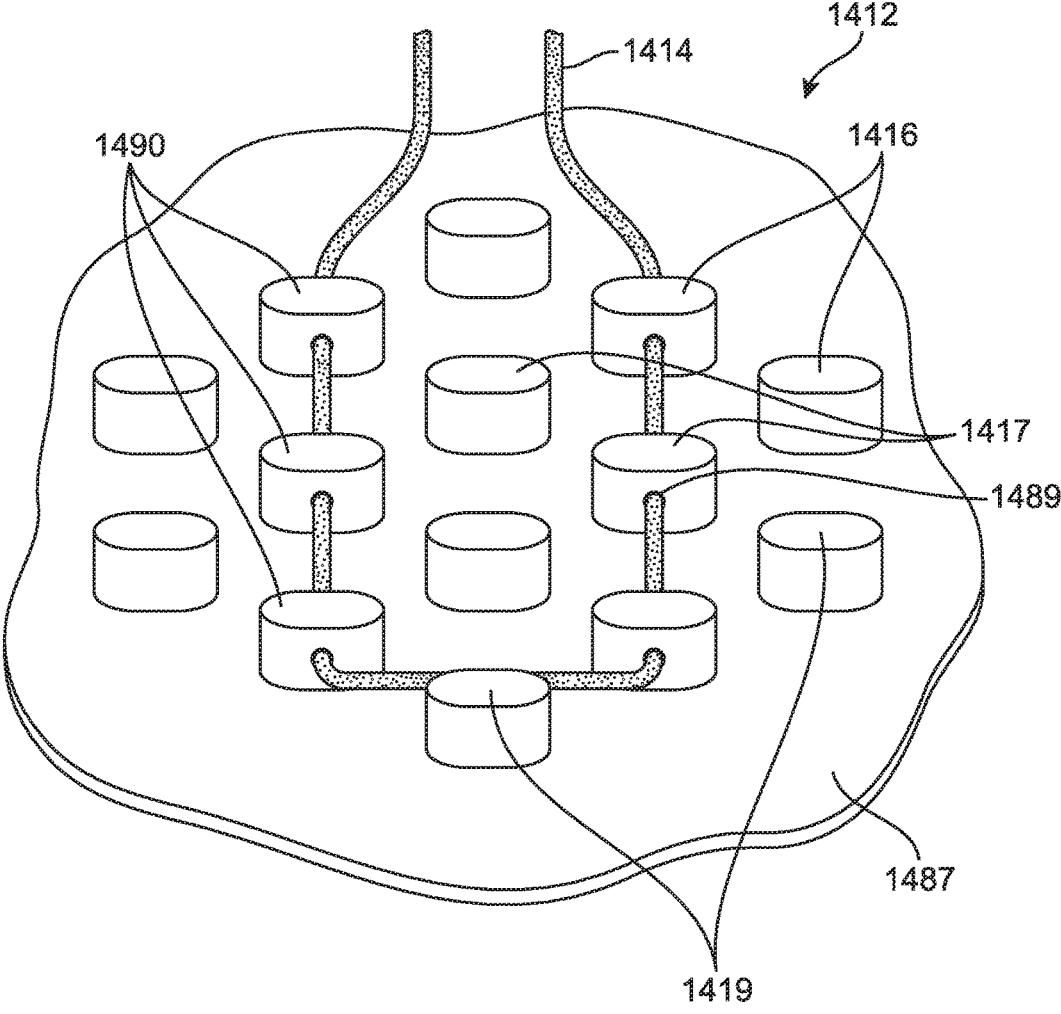


FIG. 18

ARTICLE OF APPAREL WITH DYNAMIC PADDING SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a divisional application which claims priority to U.S. application Ser. No. 14/258,613, entitled “Article of Apparel with Dynamic Padding System,” filed Apr. 22, 2014. The entirety of the aforementioned application is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] The present disclosure relates to articles of apparel that may be used for protective purposes in athletic activities.

[0003] A wide range of articles of apparel are known to be used in various sports. Generally, articles of apparel may be designed to address a variety of issues that may arise when engaging in sporting or exercise activities. For example, articles of apparel may be designed to address comfort, temperature regulation, friction, and protection. In particular, many sports use articles of apparel that include protective padding. Protective padding may be used in order to ensure the wearer's safety in the event of an impact with another player, or an impact with a ball or other sporting equipment.

[0004] Articles of apparel with protective padding are usually tailored to the needs of a specific sport. For example, football pads, hockey pads, and lacrosse pads are generally not interchangeable. However, articles of apparel with protective padding such as these may share certain general design goals. Namely, articles of apparel with protective padding generally seek to minimize bulkiness and increase flexibility, while still maintaining the necessary amount of protectiveness.

[0005] In general, the goal of providing increased flexibility may be difficult to balance with the goal of providing impact protection. A more flexible pad may transmit an impact force to the body of the wearer, risking potential injury. In contrast, a less flexible (more stiff) pad may absorb the impact force, but the stiffness may hinder the wearer's range of motion. Accordingly, a balance between these two design goals may be reached based on the types of impacts experienced and the necessary range of motion in a particular sport.

[0006] An article of apparel that is configured to change its flexibility and impact resistance as needed could potentially address a variety of these issues. Several examples exist in the art of attempts to provide such articles of apparel.

[0007] One example is shown in U.S. Patent Application Publication No. 2003/0182040 to Davidson. The Davidson disclosure is directed to an impact minimization device that uses a sensor or a system of sensors associated with a processor that determines if an impact may occur based upon analysis of information received from the sensors. When the processor determines that an impact is imminent, the processor sends a signal to a trigger that triggers a gas source that inflates an inflatable member. The inflatable member provides protection from the impending impact. The inflatable member may be provided as part of a wearable garment. The disclosure of U.S. Patent Application Publication No. 2003/0182040 to Davidson is hereby incorporated by reference in its entirety.

[0008] Another example is shown in U.S. Pat. No. 7,150,048 to Buckman. The Buckman disclosure is directed to a system for impact protection on garments. When the sensors detect the start of a fall, the system quickly activates to protect sensitive areas. The protection may take the form of an inflatable or extendible protective element. For example, when a fall is detected the garment quickly inflates so that the wearer can land on a cushion, as shown in the embodiment with an inflatable pair of shorts. U.S. Pat. No. 7,150,048 to Buckman is hereby incorporated by reference in its entirety.

[0009] However, known articles of apparel such as these do not necessarily provide all the advantages that may be desired or needed in order for the article of apparel to be used when playing sports. In particular, professional-level sports may require a certain level of flexibility and a certain level of protection from impact in order to both comply with governing body regulations and to accord with professional players' preferences.

[0010] Therefore, there exists a need in the art for an article of apparel with a dynamic padding system that balances the need for flexibility with the need for protection from impacts when engaging in athletic activities.

BRIEF SUMMARY OF THE INVENTION

[0011] Generally, this disclosure is directed to articles of apparel with padding systems that are configured to change from a first configuration to a second configuration. An article of apparel with this ability to change from a first configuration to a second configuration may be referred to as “dynamic.” The first configuration may be flexible with low protection, while the second configuration may be stiff with high protection. The flexible state allows for increased range of motion, while the stiff state provides increased protection from impact. The change occurs in a manner that is quick, reversible, and repeatable. The padding system may be configured to change in response to an impending impact, prior to the impact taking place.

[0012] In one aspect, this disclosure provides an article of apparel comprising: a dynamic padding system, the dynamic padding system including a pad, a spool, and a filament; wherein the filament is wound around the spool and extends through the pad; wherein the spool is configured to reversibly wind the filament from a first length within the pad to a second length within the pad; wherein the dynamic padding system is configured to reversibly change from a first state to a second state, the first state being associated with the first length of filament within the pad and the second state being associated with the second length of filament within the pad; the first state being associated with a first stiffness, the second state being associated with a stiffness, the second stiffness being different from the first stiffness.

[0013] In another aspect, this disclosure provides an article of apparel comprising: a dynamic padding system including a plurality of padding elements fixedly mounted on a base layer, a filament surrounding two or more of the padding elements, a spool, a portion of the filament being wound around the spool, and an input source that is configured to deliver an input to the spool; wherein the spool is configured to reversibly change the filament from a first configuration to a second configuration upon receiving the input from the input source; and wherein the two or more padding elements which are surrounded by the filament have a first distance between them when the filament is in the first

configuration, and have a second distance between them when the filament is in the second configuration, where the second distance is less than the first distance.

[0014] In a third aspect, this disclosure provides an athletic equipment system comprising: an article of apparel including a dynamic padding system; and a sensor; wherein the dynamic padding system includes a plurality of padding elements fixedly mounted on a base layer, a filament surrounding two or more of the padding elements, a spool, a portion of the filament being wound around the spool, the spool being configured to receive an input originating from the sensor; wherein the sensor is configured to sense the position and velocity of a user wearing the article of apparel, sense the position and velocity of a target, compare the position and velocity of the user with the position and velocity of the target to determine whether the user and the target will impact, and transmit a signal to the dynamic padding system; wherein the spool is configured to reversibly change the filament from a first configuration to a second configuration upon receiving the input originating from the sensor; and wherein the two or more padding elements which are surrounded by the filament have a first distance between them when the filament is in the first configuration, and have a second distance between them when the filament is in the second configuration, where the second distance is less than the first distance.

[0015] Other systems, methods, features and advantages of the invention will be, or will become, apparent to one of ordinary skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description and this summary, be within the scope of the invention, and be protected by the following claims.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0016] The invention can be better understood with reference to the following drawings and description. The components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention. Moreover, in the figures, like reference numerals designate corresponding parts throughout the different views.

[0017] FIG. 1 is a front view of a first embodiment of an article of apparel;

[0018] FIG. 2 is a side view of the first embodiment of an article of apparel;

[0019] FIG. 3 is a rear view of the first embodiment of an article of apparel;

[0020] FIG. 4A shows an article of apparel in its first configuration prior to an impending impact;

[0021] FIG. 4B shows the article of apparel of FIG. 4A in its second configuration as an impact is about to occur;

[0022] FIG. 5A-C show a cross-sectional view of the padding system of FIG. 4A and FIG. 4B, and various embodiments thereof.

[0023] FIG. 6 shows an article of apparel receiving a wireless signal from a sensor that is located some distance from the wearer of the article of apparel;

[0024] FIG. 7 shows an embodiment of an article of apparel being used in a game of hockey;

[0025] FIG. 8 shows an embodiment of an article of apparel being used in a game of lacrosse;

[0026] FIG. 9 shows an embodiment of an article of apparel being used in a game of baseball;

[0027] FIG. 10 shows a close-up view of an embodiment of a padding system;

[0028] FIG. 11 shows an exploded view of the padding system of FIG. 9;

[0029] FIG. 12 shows a close-up view of a second embodiment of a padding system, where the filament surrounds all of the padding elements;

[0030] FIG. 13 shows a close-up view of a third embodiment of a padding system, where the filament surrounds fewer than all of the padding elements;

[0031] FIG. 14 shows a close-up view of fourth embodiment of a padding system, having two spools and two filaments;

[0032] FIG. 15 shows a close-up view of a fifth embodiment of a padding system, where the filament is aligned with several rows of padding elements;

[0033] FIG. 16 shows a close-up view of a sixth embodiment of a padding system, where the padding elements have a different perimeter shape and the filament crosses back on itself;

[0034] FIG. 17 shows a close-up view of a seventh embodiment of a padding system, including multiple sets of padding elements and multiple filaments;

[0035] FIG. 18 shows an embodiment of the padding elements where the filament passes through several of them.

DETAILED DESCRIPTION OF THE INVENTION

[0036] Generally, this disclosure provides an article of apparel with a padding system that dynamically changes flexibility and impact resistance. The padding system is configured to reversibly change from a high flexibility state to a high impact resistance state, and back again. The change may be triggered by a sensor that detects when an impact is imminent. This article of apparel allows a wearer to have increased range of motion when needed, but also to have increased impact protection when needed.

[0037] FIG. 1 shows a first embodiment of first article of apparel **102**. Generally, an article of apparel may include any type of clothing worn by a person **100** on any portion of the body. For example, the term “article of apparel” may include shirts, pants, shorts, undergarments, jackets, outerwear, jerseys, one-piece skinsuits or jumpers, leggings, skirts, and any derivatives and combinations thereof. In the embodiment shown in FIG. 1, first article of apparel **102** refers to first shirt-type garment **104** and first pants-type garment **106** collectively. However, first shirt-type garment **104** and first pants-type garment **106** may also be referred to as individual articles of apparel.

[0038] In particular, an article of apparel in accordance with this disclosure may be a shirt-type garment or a pants-type garment. A shirt-type garment may be any article of apparel that covers the upper torso of the wearer, and may extend over at least a portion of the wearer’s arms. A pants-type garment may be any article of apparel that covers the lower torso of the wearer. A pants-type garment may extend over at least a portion of the wearer’s legs.

[0039] First article of apparel **102** includes multiple padding systems. Namely, first shirt-type garment **104** includes first padding system **108** and second padding system **118**. Each padding system generally includes the same three major components: a pad, a spool, and a filament. As

discussed throughout this disclosure, in some embodiments, each padding system may differ from other padding systems on an article of apparel. However, for simplicity's sake, in the embodiment of first article of apparel 102 the multiple padding systems generally do not substantially differ from each other except with respect to the location and shape of the pad.

[0040] As shown variously in FIGS. 1-3, first article of apparel 102 includes seven padding systems: first padding system 108, second padding system 118, third padding system 128, fourth padding system 138, fifth padding system 148, sixth padding system 158 and seventh padding system 168. First padding system 108 is located on right shoulder area 9001 of first shirt-type garment 104, where right shoulder area 9001 of first shirt-type garment 104 corresponds to a wearer's right shoulder when worn. Second padding system 118 is located on left shoulder area 9003, where left shoulder area 9003 corresponds to a wearer's left shoulder when first shirt-type garment 104 is worn. Third padding system 128 is located on right rib area 9005, where right rib area 9005 corresponds to a wearer's right set of ribs when worn. Fourth padding system 138 is located on left rib area 9007, where left rib area 9007 corresponds to a wearer's left ribs when first shirt-type garment 104 is worn. Fifth padding system 148 is located on right hip area 9009, where right hip area corresponds to a wearer's right hip when first pants-type garment 106 is worn. Sixth padding system 158 is located on left hip area 9011, where left hip area 9011 of first pants-type garment 106 corresponds to a wearer's left hip when worn. Finally, seventh padding system 168 is located on coccyx area 9015, where coccyx area 9015 corresponds to a wearer's coccyx when first pants-type garment 106 is worn. First article of apparel 102 may also include first static padding 178 and second static padding 180.

[0041] Generally, unless noted, a padding system may be located in any area on the article of apparel. The location of a padding system may be selected based on the needs and customs of a particular sport. However, the location of a padding system in a particular location may also achieve specific advantages by addressing the flexibility needs and protective needs of that particular area of a wearer's 100 body. For example, the location of third padding system 128 and fourth padding system 138 on rib areas 9005 and 9007 may be particularly advantageous because many sports require flexibility in the core region of the body in order to bend or turn, yet the ribs are also prone to injury. Similarly, the location of fifth padding system 148 and sixth padding system 158 on hip areas 9009 and 9011 may be particularly advantageous because increased flexibility in these areas may be conducive to faster running, as is clearly required in many sports. Finally, the location of first padding system 108 and second padding system 118 on shoulder areas 9001 and 9003 may be particularly advantageous because increased flexibility in this particular region may be required to for reaching, catching, and throwing; while the shoulders are also particularly prone to collarbone injuries (among other injuries). Accordingly, the specific locations of the padding systems shown in FIGS. 1-3 may achieve particular advantages.

[0042] Each of the seven padding systems in first article of apparel 102 will briefly be discussed as shown in FIGS. 1-3, while other figures show each of the particular components in further detail as discussed variously below. First padding

system 108 includes first spool 110 and first pad 112. First pad 112 then includes first plurality of padding elements 116 and first filament 114, where a first portion of first filament 114 winds through first pad 112 and a second portion of first filament 114 is at least partially wound around first spool 110.

[0043] Generally, first spool 110 may be any mechanism that is capable of rotating so as to wind first filament 114 around first spool 110. First filament 114 is connected to first spool 110 at all times, such as by being partially wound around first spool 110. First spool 110 may be configured to rotate in one direction to cause first filament 114 to be further wound around first spool 110, i.e. to shorten the length of first portion of first filament 114. First spool 110 is also configured to rotate in the opposite direction so that less of first filament 114 is wound around first spool 110, and first portion of first filament 114 is lengthened. For illustrative purposes, first spool 110 is shown in FIGS. 1-3 as raised and located in an upper shoulder portion. However, in other embodiments, any spool may be recessed or otherwise located, for example, between layers of material in the article of apparel in order to ensure that a spool does not interfere with any aspect of the athletic activity or become damaged or dirty with particles that could interfere with the winding mechanism. A spool may also be located in any general area relative to the pad, as long as the spool is located close enough to the pad that the filament can extend the distance between the spool and the pad, and provide sufficient tension to alter the stiffness properties of the pad. The structure of the spool is further discussed below with respect to additional figures.

[0044] First filament 114 may generally be any elongated string or wire that is sufficiently flexible as to fit the contours of first plurality of padding elements 116 while also having a sufficiently high tensile strength that first filament 114 can apply force to first plurality of padding elements 116 and resist an impact force without breaking. First filament 114 may generally be made from any natural or synthetic material. For example, first filament 114 may be made from a variety of polymers, metals, natural fibers such as cotton or wool, Kevlar, silk, and others. First filament 114 may be fibrous, consisting of smaller strands or yarns twisted together, or be of a monofilament with uniform cross-section. The structure of the filament is further discussed below with respect to additional figures.

[0045] First plurality of padding elements 116 may generally be any structures within first pad 112 that will absorb and attenuate and/or dissipate a force, such as a force from an impact. For example, padding elements may be compressible, such that the energy of an impact force will be absorbed by the compression of one or more padding elements. In particular, each padding element may extend vertically upwards and be vertically compressible. Each padding element may be made from a variety of compressible materials, such as polymer foam, open-celled foam, closed-cell foam, rubber, felt, and other materials.

[0046] First plurality of padding elements 116 may generally be arranged in a repeating pattern at some distance away from each other. A repeating pattern may include first plurality of padding elements 116 being each equally spaced from each other, or may be spaced apart from each other according to a mathematical formula. In this way, first pad 112 may be flexible because each padding element of first plurality of padding elements 116 may move independently

from any other padding element of first plurality of padding elements **116**. The structure of each padding element in each plurality of padding elements is further discussed below with respect to additional figures.

[0047] First padding system **108** is therefore comprised of three main components: first pad **112** (with plurality of padding elements **116**), first filament **114**, and first spool **110**. Each of the other padding systems on first article of apparel **102** may be comprised of equivalent components. In particular, first shirt-type garment **104** further comprises a second padding system **118**. Second padding system **118** includes second spool **120**, second pad **122** (with second plurality of padding elements **126**), and second filament **124**. Because second padding system **118** is located on shoulder area **9003**, second padding system **118** may be substantially similar to padding system **108** that is located on shoulder area **9001**.

[0048] First shirt-type garment **104** may also include third padding system **128** and fourth padding system **138**. Third padding system **128** includes third spool **130** (as shown in FIGS. 2 and 3), third pad **132** (with third plurality of padding elements **136**), and third filament **134**. Fourth padding system **138** includes fourth spool **140** (as shown in FIG. 3), fourth pad **142** (with fourth plurality of padding elements **146**), and fourth filament **144**. Third padding system **128** and fourth padding system **138** are located on rib areas **9005** and **9007** respectively, and therefore pad third **132** and pad fourth **142** may differ in shape from pad first **112**, but the padding systems may otherwise be functionally similar. Specifically, each of the first padding system **108**, second padding system **118**, third padding system **128**, and fourth padding system **138** are designed to dynamically change stiffness, but the shape of each pad may be configured to suit a particular region of a wearer's **100** body in order to best protect that region of the body.

[0049] As shown in FIGS. 1-3, first article of apparel **102** may also be inclusive of first pants-type garment **106**. First pants-type garment **106** may include fifth padding system **148** and sixth padding system **158**, located on hip areas **9009** and **9011** respectively. Fifth padding system **148** may include fifth spool **150**, fifth pad **152** (with fifth plurality of padding elements **156**), and fifth filament **154**. Sixth padding system **158** may include sixth spool **160**, sixth pad **162** (with sixth plurality of padding elements **166**), and sixth filament **164**. Fifth padding system **148** and sixth padding system **158** may differ from first padding system **108** with respect to the shape of fifth pad **152** and sixth pad **162**, due to the location on hip areas **9009** and **9011** instead of shoulder area **9001**. However, fifth padding system **148** and sixth padding system **158** may otherwise be functionally similar to first padding system **108**.

[0050] FIG. 4A and FIG. 4B show further details of how a padding system in accordance with this disclosure may be configured and operate. FIG. 5A, FIG. 5B, and FIG. 5C also show additional details of the embodiment in FIG. 4A and FIG. 4B.

[0051] In FIG. 4A, a football player **200** is wearing a second article of apparel **202** that may be substantially similar to first article of apparel **102** (shown in FIGS. 1-3). Specifically, second pants-type garment **206** may be substantially similar to first pants-type garment **106** (shown in FIGS. 1-3), and second shirt-type garment **204** may be substantially similar to first shirt-type garment **104** (shown in FIGS. 1-3). In particular, second shirt-type garment **204**

includes eighth padding system **208**. Eighth padding system **208** may be substantially similar to first padding system **108**.

[0052] As shown in FIG. 4A, football player **200** may be engaged in the activity of running with a football during a game of American football. While running with the football, player **200** seeks to avoid being tackled by other players in order to advance the position of the football on the field of scrimmage. Accordingly, player **200** may prefer to have increased flexibility in order to achieve increased running speed. Therefore, at this time, eighth padding system **208** may be in first configuration **221**. Generally, first configuration **221** may correspond to a default configuration that is associated with increased flexibility and decreased impact protection. In other words, eighth pad **212** in first configuration **221** may have a first stiffness value. As is generally known, the stiffness of an article is the extent to which it resists deformation in response to an applied force. Stiffness may be determined in accordance with a variety of known standards, as may be known to a person having ordinary skill in the art. The stiffness discussed here refers to the stiffness of the pad as a whole.

[0053] The callout of FIG. 4A shows a detailed view of eighth plurality of padding elements **216** in first configuration **221**. Out of eighth plurality of padding elements **216**, a subset of a plurality of padding elements **217** may be surrounded by filament **214**. Other padding elements **219** out of eighth plurality of padding elements **216** may remain that are not surrounded by filament **214**. Eighth plurality of padding elements **216** may be mounted on second base layer **287**, as shown in further detail in FIGS. 5A-C. Second base layer **287** may be a flexible layer made from a variety of known materials such as textiles, woven or nonwoven, or flexible polymer sheets. Generally, second base layer **287** should be sufficiently flexible as to bend in response to minimal forces caused by movement of wearer **200** through wearer's **200** normal range of motion when engaging in the sporting activity for which second article of apparel **202** is configured. That is, second base layer **287** should be flexible enough so as to not impede any range of motion as compared to when wearer **200** is not wearing any article of apparel having the padding system.

[0054] When in first configuration **221**, padding elements **217** may be a first distance **227** from each other as shown in FIG. 5A. First configuration **221** may be referred to as a relaxed state, where each of padding elements **217** may move independently from each other of padding elements **217**. Eighth pad **212** may therefore have increased flexibility, allowing wearer **200** to have a full range of motion. The first stiffness value associated with first configuration **221** may therefore be relatively low. In accordance with aspects herein, the terms "configuration" and "state" may be used interchangeably. For example, the first configuration **221** may refer to a "first state" having a first stiffness.

[0055] Wearer **200** may also be wearing first sensor **209** that may emit first sensor field **211**. First sensor **209** may be mounted on wearer **200**, as shown, or may be mounted on second article of apparel **202** so as to be considered a part of second article of apparel **202**. First sensor **209** is configured to be capable of determining when an impact between wearer **200** and another person (or object) is about to take place. Specifically, for example, first sensor **209** may be a proximity sensor. A variety of proximity sensors are known in the art, which generally are configured to emit first sensor field **211** in the electromagnetic spectrum and then send a

signal as output when first sensor field 211 is disturbed by an object in close physical proximity. Details regarding various types of proximity sensors, and which particular part of the electromagnetic spectrum used for first sensor field 211, may be known to persons having ordinary skill in the art of electrical engineering and microelectronics.

[0056] As shown in FIG. 4B, when first sensor field 211 is interrupted by second football player 201 this may trigger eighth padding system 208 to enter second configuration 223. Specifically, first sensor 209 may determine whether an impact between wearer 200 and second football player 201 is imminent. If so, first sensor 209 may trigger eighth padding system 208 to change from first configuration 221 to second configuration 223 in order to provide wearer 200 with increased impact protection. First sensor 209 may be configured such that this change from first configuration 221 to second configuration 223 takes place at some small interval of time prior to an anticipated impact, such as 0.1 seconds, or 0.01 seconds. The response times of a variety of proximity sensors are known in the art.

[0057] The change from first configuration 221 to second configuration 223 may be accomplished by using eighth filament 214 to tighten padding elements 217 together. Specifically, when eighth padding system 208 is in first configuration 221, eighth filament 214 may have first length 203 within eighth pad 212. Generally, the length of eighth filament 214 may be controlled by eighth spool 210. Namely, eighth spool 210 may unwind by rotating in one direction to allow a longer length of eighth filament 214 to extend into eighth pad 212 so that eighth filament 214 has first length 203. First length 203 refers to the length of the filament within the pad, apart from a length of filament that may be coiled on eighth spool 210 and apart from a length of filament that is outside the pad but nonetheless not coiled on eighth spool 210. The total length of eighth filament 214 does not substantially change from the first configuration to the second configuration, only the length of eighth filament 214 that is coiled on eighth spool 210 and the length of eighth filament 214 that is extending through eighth pad 212. Eighth spool 210 and eighth filament 214 may remain in first configuration 221, so that eighth filament 214 has first length 203, until receiving an input from first sensor 209.

[0058] Upon receiving an input from first sensor 209, eighth spool 210 may wind filament 214 by rotating. Eighth filament 214 then achieves second length 205 in eighth pad 212. Second length 205 may be shorter than first length 203. As a result of this decrease in length, padding elements 217 may be pushed together horizontally by eighth filament 214. Whereas padding elements 217 had first distance 227 between them when padding system 208 was in first configuration 221, padding elements 217 have second distance 229 between them when eighth padding system 208 is in second configuration 223. Second distance 229 may be less than first distance 227. The horizontal movement/deformation may be relative to a plane of second base layer 287. This is shown in FIG. 5.

[0059] Specifically, FIG. 5B shows one embodiment of how this may happen: padding elements 217 may be elastically deformed in a horizontal direction towards each other in response to a force applied by eighth filament 214 when eighth filament 214 has a shorter length (second length 205). FIG. 5C shows an alternative embodiment of second configuration 225: second base layer 287 may bend upwards (vertical relative to the plane of first base layer 287) in order

to allow padding elements 217 to have distance 231 between them. The bending of second base layer 287 in configuration 225 may be an elastic deformation, such that second base layer 287 can return to its originally configuration when eighth filament 214 is unwound such that eighth filament 214 returns to first length 203.

[0060] As a result of the decreased distance 229 (or 231) between padding elements 217 when eighth padding system 208 is in second configuration 223, the overall stiffness of eighth pad 212 may be increased. Specifically, padding elements 217 may no longer be free to move independently from each other padding element 217 in response to an impact force. Therefore, more of the impact force may be expended compressing the padding elements 217. Eighth pad 212 in second configuration 223 may therefore have a second stiffness value, where the second stiffness value is greater than the first stiffness value associated with first configuration 221. As a result of this difference in stiffness, less of an impact force may be transmitted to the wearer's 200 body when eighth pad 212 is in second configuration 223 as compared to an impact that occurs when eighth pad 212 was in first configuration 221.

[0061] Generally, second distance 229 (or 231) may be any distance that is less than first distance 227. In some embodiments, second distance 229 or 231 may be about 50% of first distance 227. In other embodiments, second distance 229 or 231 may be about 10% of first distance 227. In yet other embodiments, second distance 229 or 231 may be substantially zero. In embodiments where second distance 229 or 231 is substantially zero, at least a portion of adjacent padding elements 217 may be contiguous with each other. Generally, a smaller second distance 229/231 will result in a greater second stiffness of padding system 208 in second configuration 223. That is, the value of the second stiffness of second configuration 223 is inversely proportional to the size of distance 229/231.

[0062] The change from first configuration 221 to second configuration 223 (or 225) may preferably be reversible. Any deformation of padding elements 217 or second base layer 287 may be fully elastic. Once eighth padding system 208 has changed to second configuration 223, eighth spool 210 may ensure that eighth filament 214 remains at second length 205 until the impact occurs. Then, eighth padding system 208 may be configured to reset eighth filament 214 back to first length 203 by winding eighth spool 210 in an opposite direction as the winding that changed filament 214 from length 203 to length 205. This reset may be triggered by first sensor 209, such as by another interaction with first sensor field 211, or after a predetermined period of time. In embodiments where the reset occurs after a predetermined time, first sensor 209 may also include a timing mechanism as part of microprocessor controls (not shown) contained within first sensor 209.

[0063] FIG. 6 shows second sensor 309, which is an alternative embodiment of first sensor 209. In the particular embodiment shown in FIG. 6, second sensor 309 may be located some distance from wearer 300. For example, second sensor 309 may be located on a sideline that is off of a field of play. Second sensor 309 may emit one or more sensor fields, such as second sensor field 311 and third sensor field 313 (second sensor field 311 being the first of two sensor fields within the embodiment of FIG. 6, and third sensor field 313 being the second of two sensor fields within the embodiment of FIG. 6), which enable the sensor to

obtain relevant information about wearer 300 and a target such as other player 301. In particular, second sensor 309 may be configured to sense the position and velocity of wearer 300 as well as the position and velocity of other player 301. Second sensor 309 may then be configured to compare this information, such as through the use of a general purpose computer including microprocessor controls, to determine whether an impact will take place between wearer 300 and target 301. If such an impact is anticipated to occur, second sensor 309 may transmit wireless signal 315 to third padding system 328 in order to cause third padding system 328 to change from a first configuration to a second configuration.

[0064] In the embodiment shown in FIG. 6, only third padding system 328 is shown for illustrative purposes. However, third article of apparel 302 may include multiple padding systems, for example as in the embodiment of an article of apparel shown in FIGS. 1-3. In such embodiments, second sensor 309 may be configured to transmit wireless signal 315 to one specific padding system, based on the location of the impending impact between wearer 300 and target 301. For example, in one embodiment, second sensor 309 may send wireless signal 315 to a padding system located specifically on the right side of third article of apparel 302 or on the left side of third article of apparel 302. In another embodiment, second sensor 309 may send wireless signal 315 specifically to a padding system located on a hip area. In the particular embodiment shown in FIG. 6, second sensor 309 may send wireless signal 315 specifically to a padding system located on a right rib area 9005 of third article of apparel 302 that corresponds to a right set of ribs of wearer 300 when article of apparel 302 is worn.

[0065] Generally, an article of apparel in accordance with this disclosure may be used in a variety of sports. FIGS. 7-9 show various embodiments of several articles of apparel in use in different sports.

[0066] FIG. 7 shows fourth article of apparel 402 in use in a game of hockey. Wearer 400 uses fourth article of apparel 402, which includes third shirt-type garment 404 and third pants-type garment 406. Third shirt-type garment 404 includes ninth padding system 408. Third sensor 409 emits fourth sensor field 411 that detects an impending impact from other player 401. Generally, each of these components may be in accordance with the discussion above detailing the components in other embodiments of an article of apparel. However, third shirt-type garment 404 and third pants-type garment 406 may both be particularly configured for use in hockey, and may comply with all requirements and rules for hockey equipment as may be instituted by one or more of the sport's governing bodies.

[0067] FIG. 8 shows fifth article of apparel 502 as worn by wearer 500 playing a game of lacrosse. Fifth article of apparel 502 includes tenth padding system 508. Tenth padding system 508 may be triggered by fourth sensor 509 when fifth sensor field 511 interacts with other lacrosse player 501. Fifth article of apparel 502 and its components may be substantially similar as in other embodiments discussed above. However, fifth article of apparel 502 may also be particularly suited for the game of lacrosse, and may comply with all requirements and rules for lacrosse equipment as may be instituted by one or more of the sport's governing bodies.

[0068] FIG. 9 shows sixth article of apparel 602 as worn by wearer 600, who is a baseball catcher. Unlike other

embodiments discussed above, but similar to the embodiment of FIG. 13 discussed below, sixth padding system 602 may include two padding systems. Specifically, sixth padding system may include both eleventh padding system 608 and twelfth padding system 618 on a single pad, ninth pad 612. Eleventh padding system 608 is the first of two padding systems in sixth padding system 602, and twelfth padding system 618 is the second of two padding systems in sixth padding system 602.

[0069] As shown in FIG. 9, eleventh padding system 608 and twelfth padding system 618 may encompass separate groups of padding elements within the total of ninth plurality of padding elements 616 on pad 612. Specifically, ninth filament 614 encompasses plurality of padding elements 617. On the other hand, twelfth padding system 618 encompasses plurality of padding elements 627 within tenth filament 624. In eleventh padding system 608, ninth filament 614 is connected to ninth spool 610. In twelfth padding system 618, tenth filament 624 is connected to tenth spool 620. This particular embodiment of sixth article of apparel 602, which includes two padding systems within one pad (ninth pad 612), may be configured such that fifth sensor 609 may selectively trigger only one (or both) padding systems depending on the location of an impending impact with target baseball 601. This embodiment of sixth article of apparel 602 may therefore retain flexibility in one area of ninth pad 612, while also providing impact resistance in another area of ninth pad 612.

[0070] FIGS. 10 and 11 show further details of first padding system 108 from the embodiment shown in FIGS. 1-3 as discussed above. In FIG. 10, first pad 112 may include first plurality of padding elements 116. Some of first plurality of padding elements 116 may be categorized as being surrounded by first filament 114, these particular padding elements are designated as padding elements 117. The remainder of first plurality of padding elements 116 that are not surrounded by first filament 114 are designated as padding elements 119. In FIG. 10, first padding system 108 is shown in first configuration 121, wherein first filament 114 may be loose around padding elements 117 and does not compress any of padding elements 117 together to any significant degree. In first configuration 121 as shown in FIGS. 10 and 11, first filament 114 may have first length 103 that is apart from spool 110.

[0071] FIG. 11 also shows further detail of first spool 110 and how first filament 114 may be connected to first spool 110. First spool 110 may be considered as being inclusive of the structures: first cylinder 183, first mounting plate 185, and first attachment 184 as shown in FIG. 11. First filament 114 may be at least partially wound around first cylinder 183. First cylinder 183 may be configured to rotate as noted in FIG. 10 to wind and unwind first filament 114. First cylinder 183 may include features (not shown) in order to achieve this end, such as: an actuator motor to rotate first cylinder 183, a power source for the motor such as a lithium ion rechargeable battery; and a latch mechanism that may reversibly hold first cylinder 183 in a specific position after it rotates. First mounting plate 185 and first attachment 184 may generally be any system for attaching first spool 110 to a remainder of first article of apparel 102.

[0072] Next, first filament 114 may include first filament portion 107 that is wound around cylinder 183 when first padding system 108 is in first configuration 121. First filament 114 then also includes second filament portion 109

that extends through first pad 112 when first padding system 108 is in first configuration 121. First filament 114 may also be described as being arranged in first pad 112 in first filament pattern 115. A filament pattern may be described as the arrangement a filament makes as it winds around and between any associate padding elements. In the embodiment of FIG. 10, first filament pattern 115 encompasses a majority of plurality of padding elements 116, and first filament pattern 115 may have a generally square shape. However, other patterns of the filament may be used in other embodiments as discussed below.

[0073] First padding system 108 also includes first antenna 181. First antenna 181 may be any known antenna that is configured to receive a signal from a sensor, such as first sensor 209 or second sensor 309. First padding system 108 may include first antenna 181 even in embodiments (such as second article of apparel 202 discussed above) where a sensor (such as first sensor 209) is mounted on wearer 200, in order to avoid the need for wires and reduce bulkiness and weight of the article of apparel. First antenna 181 may be connected to first spool 110 by first wire 182. Generally, first article of apparel 102 may include some input source for first spool 110 that triggers the spool to change the filament length from a first length to a second length. In the embodiment shown in FIG. 9, first antenna 181 may be considered to be the input source.

[0074] FIG. 11 shows an exploded view of first padding system 108, from the same perspective as FIG. 10. In particular, FIG. 11 shows how first pad 112 may be comprised of first pad cover 186, first plurality of padding elements 116, and first base layer 187. First pad cover 186 may generally be any structure that covers the remainder of first pad 112, in order to retain first filament 114 in its predetermined first filament pattern 115. However, first pad cover 186 may also be reversibly detachable in some embodiments. A reversibly detachable first pad cover 186 may allowed first filament pattern 115 of first filament 114 to be customized by a user to a desired arrangement, prior to a use of the article of apparel 102 incorporating first padding system 108. First pad cover 186 may generally be sufficiently flexible so that first pad 112 will not inhibit a wearer's range of motion when in first configuration 121.

[0075] FIGS. 12 through 15 show a variety of other arrangements of the filament pattern, among other disclosed features. In FIG. 12, thirteenth padding system 708 includes eleventh spool 710 and tenth pad 712. Eleventh spool 710 includes second cylinder 783, second mounting plate 785, and second attachment 784. Eleventh spool 710 is also connected to input source second antenna 781 by second wire 782. In accordance with aspects herein, the input source second antenna 781 may be referred to as a "second input source." Tenth pad 712 includes tenth plurality of padding elements 716 and third base layer 787, with eleventh filament 714. In this particular embodiment, eleventh filament 714 encompasses all of tenth plurality of padding elements 716, such that the group of padding elements 717 encompassed by eleventh filament 714 is the same as the group of all of tenth plurality of padding elements 716. FIG. 11 also illustrates how some padding elements in the group 717 may be directly adjacent to eleventh filament 714, this group of padding elements is referred to as padding element group 790. Others of padding elements 717 may be surrounded by eleventh filament 714 without being directly adjacent to eleventh filament 714, this group of padding elements is

referred to as padding group 791. Generally, second filament pattern 715 of eleventh filament 714 as shown in FIG. 11 will compress group 790 together and in towards group 791, such that all of padding elements 717 may be compressed together to increase the collective stiffness of tenth pad 712.

[0076] FIG. 13 shows yet another embodiment of a fourteenth padding system 808. Fourteenth padding system 808 includes twelfth spool 810, with third cylinder 883, third mounting plate 885, and third attachment 884. Twelfth spool 810 is also connected to third wire 882 which connects to a sixth sensor 809 that emits sixth sensor field 811. In this embodiment, twelfth spool 810 is hardwired to sixth sensor 809 by third wire 882. Sixth sensor 809 may be a sensor mounted on another aspect of the wearer, as shown in FIG. 4A with respect to first sensor 209. Alternatively, in some embodiments, sixth sensor 809 may be incorporated into the article of apparel containing fourteenth padding system 808. For example, a proximity sensor may be used for sixth sensor 809, and sixth sensor 809 may be incorporated into article of apparel adjacent to (or even under neither or on top of) the location of fourteenth padding system 808. In such embodiments, a proximity sensor sixth sensor 809 may detect an impending impact simply by (for example) sensing movement near the physical location of sixth sensor 809, thus simplifying the workings of fourteenth padding system 808 and obviating the need for a separate microprocessor to process information.

[0077] FIG. 13 also shows third filament pattern 815 of twelfth filament 814. In this embodiment, eleventh plurality of padding elements 816 may be grouped into padding elements 817 surrounded by twelfth filament 814 and padding elements 819 that are not surrounded by twelfth filament 814. Within group 817, padding elements which are in direct contact with twelfth filament 814 may be referred to as padding element group 890, while padding elements 817 which are not in direct contact with twelfth filament 814 may be referred to as padding element group 891. In this embodiment, padding element group 891 includes far fewer padding elements than padding element group 890. This configuration of third filament pattern 815 may result in twelfth filament 814 compressing padding element group 890 together in such a way as to create higher stiffness values in certain areas of the eleventh pad 812, while retaining flexibility in other certain areas of the eleventh pad 812. This may be particularly advantageous in order to isolate where on eleventh pad 812 increased stiffness is needed to protect from a particular type of impact.

[0078] Next, FIG. 14 shows an embodiment of a fifteenth padding system 908 with two spools, thirteenth spool 910 and fourteenth spool 1010 each surrounding different groups of twelfth plurality of padding elements 916 on twelfth pad 912. Thirteenth spool 910 is the first of two spools in fifteenth padding system 908, while fourteenth spool 1010 is the second of two spools in fifteenth padding system 908. Thirteenth spool 910 includes fourth cylinder 983, fourth mounting plate 985, and fourth attachment 984. Thirteenth spool 910 is also attached to seventh sensor 909 which emits seventh sensor field 911, and is connected by fourth wire 982. Seventh sensor 909 and related components may be substantially similar to sixth sensor 809 of fourteenth padding system 808 shown in FIG. 13 and discussed above. Thirteenth spool 910 is connected to thirteenth filament 914. Thirteenth filament 914 surrounds padding elements 917 in fourth filament pattern 915. Within padding elements 917,

thirteenth filament **914** directly contacts padding elements **990** but does not directly contact padding elements **991**.

[0079] However, unlike most other embodiments described in this disclosure, fifteenth padding system **908** also includes a second spool, fourteenth spool **1010**. Fourteenth spool **1010** includes fifth cylinder **1083**, fifth mounting plate **1085**, and fifth attachment **1084**. Eighth sensor **1009** is attached to fourteenth spool **1010** by fifth wire **1082**, and emits eighth sensor field **1011**. Fourteenth spool **1010** is connected to fourteenth filament **1014**, which in turn surrounds padding elements **1017** in fifth filament pattern **1015**. Within padding elements **1017**, fourteenth filament **1014** directly touches padding elements **1090** but does not touch padding elements **1091**. In this embodiment, padding elements **1017** and padding elements **917** are two non-overlapping groups of padding elements. In other words, none of plurality of padding elements **916** belongs to both group **917** and group **1017**. This occurs because thirteenth filament **914** and fourteenth filament **1014** are arranged in fourth filament pattern **915** and fifth filament pattern **1015**, respectively, that do not overlap each other. This type of embodiment may be advantageous for isolating a certain area of twelfth pad **912** to achieve increased stiffness on demand, while allowing the remainder of twelfth pad **912** to simultaneously be flexible. This embodiment is also similar to the embodiment shown in FIG. 9, as was discussed above.

[0080] FIG. 15 shows yet another embodiment of a padding system sixteenth **1108**. Sixteenth padding system **1108** may be substantially similar to fourteenth padding system **808**, except that fifteenth filament **1114** may be arranged in a different sixth filament pattern **1115** than third filament pattern **815**. In the embodiment of FIG. 14, fifteenth filament **1114** may encompass some of thirteenth plurality of padding elements **1116** in such a manner that all padding elements so surrounded are in direct contact with fifteenth filament **1114**. Therefore, padding elements **1117** surrounded by fifteenth filament **1114** may be the same as padding element group **1190** that are surrounded by and in direct contact with fifteenth filament **1114**. In the particular embodiment shown, sixth filament pattern **1115** is also configured so as to encompass entire rows **1192** of padding elements **1117**. By alternating rows **1192** surrounded by fifteenth filament **1114** with rows **1193** that are not surrounded by fifteenth filament **1114**, fifteenth filament **1114** may compress padding elements **1117** together in such a way that sixteenth padding system **1108** may have a relatively high stiffness in one direction (along the length of each row **1192**) while also being entirely flexible in a different direction (orthogonal to each row **1192**). This particular configuration may be advantageous to protecting from certain types of impacts, or protecting certain areas of a wearer's body, along one axis while still allowing for full range of motion along another axis.

[0081] FIG. 16 shows an embodiment of a seventeenth padding system **1208** that differs from other padding systems described above not only in the shape of seventh filament pattern **1215** of sixteenth filament **1214**, but also with respect to perimeter shape **1299** of each of fourteenth plurality of padding elements **1216**. Whereas various padding elements throughout this disclosure have been shown to have a generally oval perimeter shape, perimeter shape **1299** in FIG. 16 is an octagon. The octagon perimeter shape **1299** may be advantageous in that it allows for each side to be pressed flat against the side of an adjacent padding element

when sixteenth filament **1214** constricts padding elements **1217** together. This may create a more secure interlocking grid of compressed padding elements, which may increase the stiffness of seventeenth padding system **1208** when seventeenth padding system **1208** is in its second configuration (not shown).

[0082] Furthermore, FIG. 16 also shows sixteenth filament **1214** with seventh filament pattern **1215** that includes points **1294** and **1295** where sixteenth filament **1214** crosses back over itself. As a result, crossover point **1294** creates first closed loop **1296** and second closed loop **1297**. Crossover point **1295** then creates third closed loop **1298**. Second closed loop **1297** surrounds padding elements **1221**, while third closed loop surrounds padding elements **1223**. Padding elements **1219** are not surrounded by any loop. The use of these closed loops may be particularly advantageous for compressing each group of padding elements together, without pressing the padding elements from one loop together with the padding elements of another loop. As a result, the stiffness of seventeenth padding system **1208** in a second configuration can be localized to particular zones among fourteenth plurality of padding elements **1216**.

[0083] FIG. 17 shows another embodiment of a eighteenth padding system **1308**. Like fifteenth padding system **908**, eighteenth padding system **1308** includes multiple filaments. However, in eighteenth padding system **1308** these multiple filaments are all connected to a single spool, fifteenth spool **1310**. Eighteenth padding system includes three filaments and three pads. Specifically, seventeenth filament **1314** (the first of three filaments) is wound onto fifteenth spool **1310** and surrounds padding elements **1317** out of fifteenth plurality of padding elements **1316** on thirteenth pad **1312** (the first of three pads). Next, eighteenth filament **1324** (the second of three filaments) is wound onto fifteenth spool **1310** and surrounds padding elements **1327** out of sixteenth plurality of padding elements **1326** on fourteenth pad **1322** (the second of three pads). Finally, nineteenth filament **1334** (the third of three filaments) is wound onto fifteenth spool **1310** and surrounds padding elements **1336** on fifteenth pad **1332** (the third of three pads). Each of thirteenth pad **1312**, fourteenth pad **1332**, and fifteenth pad **1332** may all be mounted on fourth base layer **1387**. The use of multiple pads with multiple filaments connected to a single spool may be advantageous to deliver stiffness to multiple specific zones of the overall eighteenth padding system **1308** simultaneously, while using areas between the multiple pads to achieve flexibility.

[0084] FIG. 18 shows an alternative embodiment of the padding elements, and their relation to a filament. In particular, FIG. 18 shows how certain padding elements **1490** may include a through-hole **1489** through which twentieth filament **1414** is threaded. Twentieth filament **1414** may therefore pull padding elements **1417** together by pulling padding elements **1490** inward from the center of each padding element **1490**. Other components of sixteenth pad **1412**, such as fifth base layer **1487** and padding elements **1419** not surrounded by twentieth filament **1414** may be as discussed variously above with respect to other embodiments. The embodiment having through-hole **1489** may be particularly advantageous in order to achieve increased force holding padding elements **1417** together when sixteenth pad **1412** is in a second configuration (not shown), thereby achieving increased stiffness. This configuration of the

through-holes **1489** may be used in any of the discussed padding systems and articles of apparel.

[0085] Accordingly, as discussed above, the various embodiments shown in this disclosure may advantageously be used in sporting endeavors in order to providing impact protection when needed but also achieve flexibility when impact protection is not otherwise needed. The spool and filament system is advantageous in that it is robust in the face of stresses encountered in athletic activities, and is easily reversible. The sensor associated with the article of apparel may enable the padding system on the article of apparel to change from a low stiffness state to a high stiffness state before an impact occurs. Finally, the article of apparel and padding system may be tailored to suit the protective needs of a variety of sports.

[0086] Generally, unless this disclosure indicates to the contrary, any feature disclosed herein with respect to one embodiment may be combined with any other feature(s) disclosed with respect to any other embodiment, to form any combination or sub-combination thereof.

[0087] Although the embodiments in this disclosure depict articles of apparel with a dynamic padding system, it is contemplated that other embodiments could include dynamic systems in (for example) articles of footwear such as athletic sneakers or hiking boots. In particular, any of the various features and embodiments disclosed herein may be used in conjunction with any features or disclosures in Rushbrook, U.S. Patent Publication Number US2015/0296922 published Oct. 22, 2015, now U.S. Pat. No. 9,380,834, filed Apr. 22, 2014, and titled "Article of Footwear with Dynamic Support" the entirety of which is herein incorporated by reference.

[0088] While various embodiments of the invention have been described, the description is intended to be exemplary, rather than limiting and it will be apparent to those of ordinary skill in the art that many more embodiments and implementations are possible that are within the scope of the invention. Accordingly, the invention is not to be restricted except in light of the attached claims and their equivalents. Also, various modifications and changes may be made within the scope of the attached claims.

Having thus described the invention, what is claimed is:

1. An article of apparel comprising:
 - a dynamic padding system including a plurality of padding elements fixedly mounted on a base layer,
 - a filament surrounding two or more of the padding elements,
 - a spool, a portion of the filament being wound around the spool, and an input source that is configured to deliver an input to the spool;
 - wherein the spool is configured to reversibly change the filament from a first configuration to a second configuration upon receiving the input from the input source; and
 - wherein the two or more padding elements surrounded by the filament have a first distance between them when the filament is in the first configuration and a second distance between them when the filament is in the second configuration, the second distance being less than the first distance.
2. The article of apparel according to claim 1, wherein the input source is an antenna that is configured to receive a wireless signal transmitted by a signal source.

3. The article of apparel according to claim 1, wherein the input source is a proximity sensor.

4. The article of apparel according to claim 1, wherein each padding element extends outward from the base layer in a longitudinal orientation and is compressible in the longitudinal orientation.

5. The article of apparel according to claim 1, wherein at least one of the two or more padding elements is elastically deformed in a direction towards the other of the two or more padding element by the filament when the filament is in the second configuration.

6. The article of apparel according to claim 1, wherein the filament forms a bounded area that decreases in size in the second configuration and that corresponds with a first portion of the base layer and wherein a second portion of the base layer extending beyond the first portion of the base layer elastically deforms in the second configuration.

7. The article of apparel according to claim 1, wherein, when the filament is in the second configuration, the padding elements are in direct contact, such that the two or more padding elements surrounded by the filament are adjacent to each other.

8. The article of apparel according to claim 1, wherein the spool is configured to change the filament from the second configuration back to the first configuration in response to a second input.

9. The article of apparel according to claim 1, wherein the spool is configured to change the filament from the second configuration back to the first configuration after predetermined amount of time.

10. The article of apparel according to claim 1, wherein the article of apparel further comprises:

- a second filament, the second filament surrounding two or more padding elements out of the plurality of padding elements;
- a second spool, a portion of the second filament being wound around the second spool; and
- a second input source that is configured to deliver an input to the second spool;

wherein the second spool is configured to reversibly change the second filament from a first configuration to a second configuration upon receiving the input from the second input source;

wherein the two or more padding elements surrounded by the second filament have a first distance between them when the second filament is in the first configuration and a second distance between them when the second filament is in the second configuration, the second distance being less than the first distance.

11. An article of apparel comprising:

- a dynamic padding system including
 - a plurality of padding elements fixedly mounted on a base layer,
 - a filament surrounding a first group of two or more of the padding elements in a first pattern,
 - a spool, a portion of the filament being wound around the spool;
 - wherein the spool is configured to reversibly change the filament from a first configuration to a second configuration; and
 - wherein the two or more padding elements surrounded by the filament have a first distance between them when the filament is in the first configuration and a second distance between them

when the filament is in the second configuration, the second distance being less than the first distance.

12. The article of apparel according to claim **11**, wherein the first pattern encompasses all of the plurality of padding elements.

13. The article of apparel according to claim **11**, wherein the first pattern encompasses at least two rows of padding elements, and each row of padding elements within the first pattern is separated from each other row of padding elements within the first pattern by a row of padding elements that is outside the first pattern.

14. The article of apparel according to claim **11**, wherein the first pattern includes at least one point where the filament overlaps itself, such that the filament forms at least two closed loops each surrounding a respective subset of the first group of padding elements.

15. An athletic equipment system comprising:

an article of apparel including a dynamic padding system including a plurality of padding elements fixedly mounted on a base layer;

a filament surrounding two or more of the padding elements;

a spool, a portion of the filament being wound around the spool, the spool being configured to receive an input originating from the sensor, wherein the spool is configured to reversibly change the filament from a first configuration to a second configuration upon receiving the input originating from the sensor; and

a sensor configured to sense the position and velocity of a user wearing the article of apparel, sense the position and velocity of a target, compare the position and velocity of the user with the position and velocity of the target to determine whether the user and the target will impact, and transmit a signal to the dynamic padding system;

wherein the two or more padding elements which are surrounded by the filament have a first distance between them when the filament is in the first configuration, and have a second distance between them when the filament is in the second configuration, where the second distance is less than the first distance.

16. The athletic equipment system of claim **15**,

wherein the article of apparel includes a plurality of dynamic padding systems;

each dynamic padding system is located on a separate area of the article of apparel;

each of the plurality of dynamic padding systems respectively includes a plurality of padding elements fixedly mounted on a based layer; a filament surrounding two or more of the respective padding elements, a spool having a portion of the respective filament wound around the spool, each spool being configured to receive an input originating from the sensor;

wherein each respective spool is configured to reversibly change each respective filament from a first configuration to a second configuration upon receiving the input originating from the sensor;

wherein each of the two or more padding elements which are surrounded by each respective filament have a first distance between them when each filament is in the first configuration, and have a second distance between them when each filament is in the second configuration, where the second distance is less than the first distance; and

wherein the sensor is configured to transmit a signal to a specific dynamic padding system of the plurality of dynamic padding systems, based on the location of an impact between the user wearing the article of apparel and the target.

17. The athletic equipment system of claim **15**, wherein the sensor is mounted on an outer-facing surface of the article of apparel, and the sensor transmits the input to the spool via a wire.

18. The athletic equipment system of claim **15**, wherein the dynamic padding system includes further comprises an antenna;

the sensor is configured to transmit a wireless signal; and the antenna is configured to receive the wireless signal from the sensor and deliver the input to the spool based on the wireless signal.

* * * * *